



Marketed in India by:

**Anchor Electricals Pvt. Ltd.**

A member of the Panasonic Group

3rd Floor, B Wing, I-Think Techno Campus, Pokharan Road No. 2, Thane (W), Thane 400 607. Maharashtra  
Customer Care Cell: 1800-103-8606 | T: [9122] 30418888 | E: info@anchor-world.com | W: www.anchor-world.com  
URL: <http://panasonic.net/ecosolutions/lighting/in/>

**Panasonic**

All Rights Reserved © 2015 COPYRIGHT Anchor Electricals Pvt. Ltd.  
Specifications are subject to change without notice  
Printed in India

The duplication and transfer of images from this catalogue without permission is strictly prohibited.

**Panasonic**

Professional Lighting Catalogue

**LED**

IMAGINATION CREATES REALITY.

CUSTOMISED LED LIGHTINGS FOR EVERY PROFESSIONAL LOOK.



October 2018



# LIGHTING THE WAY TO A BETTER WORLD

Light does not only illuminate objects. It also dramatically enhances the atmosphere of living spaces as well as allows for the occupants to feel relaxed and at ease. LED lighting, in particular, offers greater energy savings along with higher colour rendering properties, opening up a new realm of possibilities.

For over 60 years, Panasonic has continued to advance lighting in terms of technology, quality, and design methods for spaces. Panasonic now enjoys a proven track record as a trusted, first choice brand of lighting products in Japan.\*

"Panasonic LED" will continue to achieve greater energy savings while enriching various living spaces and urban environments around the world.

Experience for yourself how our LED lighting products add value to any application.

\*Panasonic survey in September 2014

## Panasonic LED



## MORE BEAUTY

Uniformly bright light and distinct shadows provides maximum lighting quality to create living environments with more beauty



## MORE COMFORT

Optimal lighting solutions created with Panasonic Lighting design methods for spaces make everyday living more comfortable.

## MORE RELIABILITY

Uncompromised quality following stringent internal safety standards along with international standards to ensure long-term reliability







## PANASONIC'S UNIQUE PROFESSIONAL ASSISTANCE

Panasonic Professional Lighting offers 3 core values;

### **Beauty, Comfort, and Reliability**

In addition to the 3 core values we also provide assistance through our light engineering support, technical tools and Panasonic unique Technologies.

We provide solutions that balance out customer's business success and environmental & social sustainability

\*Panasonic survey in September 2014

### Planning and basic design

- Creating the lighting concept
- A sketched image of the proposal
- Collaboration with designers and architects.

### Testing and on-site validation

- Use various lamps to test contrast effects
- Experimentation through a mockup
- Examination of the appearance of the light distribution and colour



### Design and implementation

- Light distribution plan
- Considering the human sense of brightness through Feu
- Verification by real CG

### Validation after completion

- Confirmation and adjustment on site at time of delivery
- Validation of illumination and Feu after delivery
- Accumulation of know-how

# INDEX

01

COMMERCIAL LIGHTING

01 - 16

- BASE LIGHT
- ULTRA SLIM BASE LIGHT
- TECHZONE
- SUSPENDED LINEAR UP DOWN TYPE
- SUSPENDED LINEAR DOWN TYPE
- RECESSED LINEAR FIXTURE
- ALUMINIUM DOWN LIGHT
- PC DOWN LIGHT

02

RETAIL & HOSPITALITY LIGHTING

17 - 32

- COB DOWN LIGHT
- IP65 DOWN LIGHT
- ADJUSTABLE DOWN LIGHT
- TRIMLESS DOWN LIGHT ADJUSTABLE
- TRIM DOWN LIGHT
- PIN HOLE ADJUSTABLE DOWN LIGHT
- TRACK LIGHT

03

INDUSTRIAL LIGHTING

33 - 58

- SUSPENDED HIGH BAY
- HIGH BAY MODULE LIGHT
- LINEAR HIGHBAY LIGHT
- CIRCULAR BAY LIGHT
- CLEANROOM
- WELL GLASS
- BULK HEAD
- INDUSTRIAL BATTEN

04

OUTDOOR LIGHTING

59 - 72

- STREET LIGHT
- FLOOD LIGHT
- POST TOP LIGHT
- BOLLARD LIGHT
- SPIKE LIGHT
- STEP LIGHT
- UP DOWN LIGHT
- IN-GROUND LIGHT





# COMMERCIAL LIGHTING





# BASE LIGHT



New deep type recess mounting LED luminaire equipped with CRCA powder coating housing , anti glare diffuser with separate energy efficient electronic driver.

## Product Specification



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

## Application areas

Corporate Offices | Modern Workspaces  
Banks | Software Centres | Hospitals


	<div>NEW</div> 20W	<div>NEW</div> 25W	25W	30W	36W
3000K	-	-	PBLM05253 2625lm	PBLM05303 3150lm	PBLM01363 3000lm
4000K	PBLM05204 2300lm	PBLM11254 3000lm	PBLM05254 2750lm	PBLM05304 3210lm	PBLM01364 3300lm
6500K	PBLM05207 2500lm	PBLM11257 3250lm	PBLM05257 3000lm	PBLM05307 3300lm	PBLM01367 3600lm
Weight	4.2kg	4.2kg	4.43kg	4.43kg	4.43kg
Dimension (mm) (L/Dia x W/Dia x H)	595 x 595 x 70	595 x 595 x 70	595 x 595 x 75	595 x 595 x 75	595 x 595 x 75
Cut Out Dimension (mm)	575 X 575	575 X 575	575 X 575	575 X 575	575 X 575

Line  
Diagram

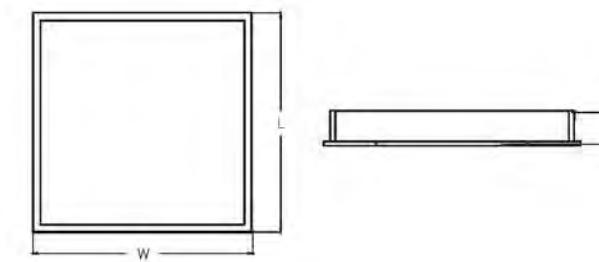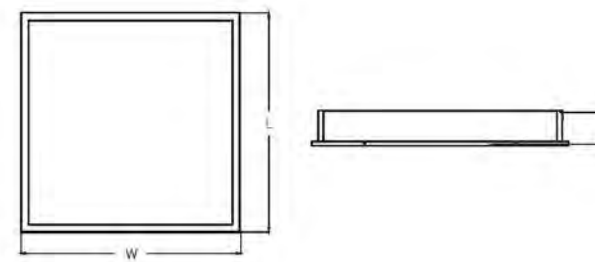


Photometric  
data


PBLM05207

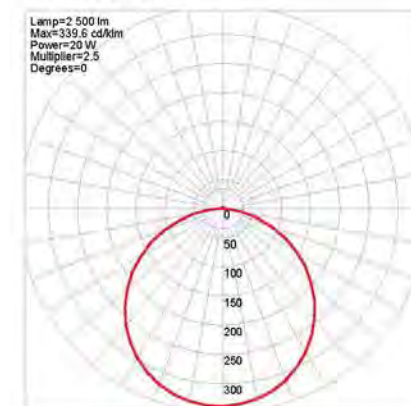


PBLM11257

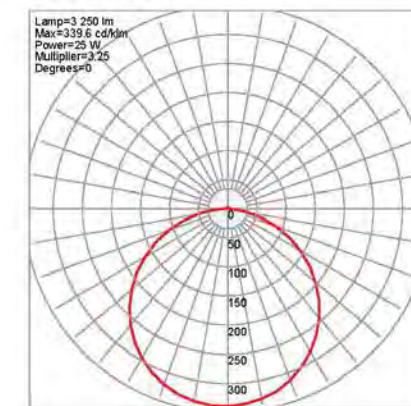


PBLM05257

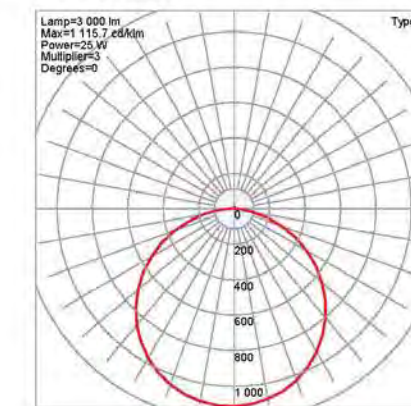

PBLM05307

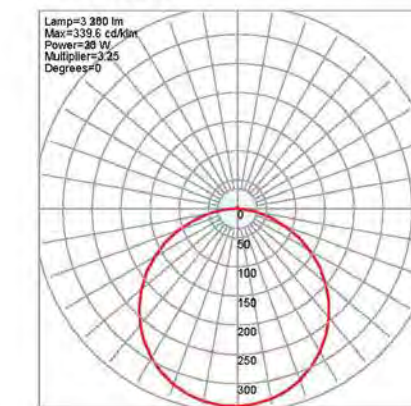

PBLM01367

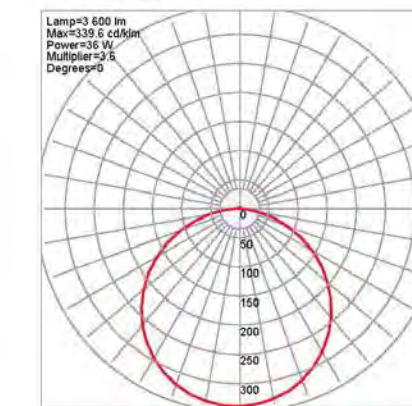



## ULTRA SLIM BASE LIGHT

Ultra slim edge lit type recess mounting LED luminaire with extruded aluminium housing, anti glare diffuser and separate energy efficient electronic driver.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-277V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

### Application areas


Corporate Offices | Modern Workspaces  
Banks | Conference | Software Centres | Hospitals

	36W	40W
3000K	-	PBLM03403 3920lm
4000K	PBLM09364 3420lm	PBLM03404 4120lm
6500K	PBLM09367 3600lm	PBLM03407 4240lm
Weight	2.5kg	3.2kg
Dimension (mm) (L/Dia x W/Dia x H)	595 x 595 x 10	595 x 595 x 9.6
Cut Out Dimension (mm)	580 X 580	570 X 570

Note : PBLM10XXX with POP Clip Option

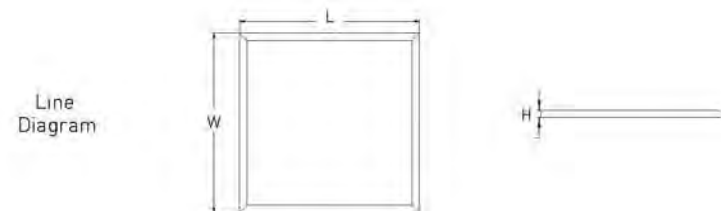

Photometric data

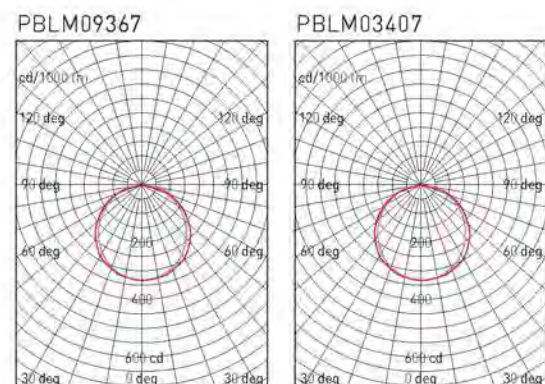

\*Condition Apply

## ULTRA SLIM BASE LIGHT

Ultra slim edge lit type LED luminaire equipped with recess arrangement (pendant mounting is also available on request), extruded aluminium housing, anti glare diffuser and separate energy efficient electronic driver.



### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-277V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

### Application areas


Corporate Offices | Modern Workspaces  
Banks | Conference | Software Centres | Hospitals

	40W
3000K	PBLM04403 3600lm
4000K	PBLM04404 3780lm
6500K	PBLM04407 3880lm
Weight	3.4kg
Dimension (mm) (L/Dia x W/Dia x H)	295 x 1195 x 9.6
Cut Out Dimension (mm)	275 X 1175

Line Diagram



Photometric data

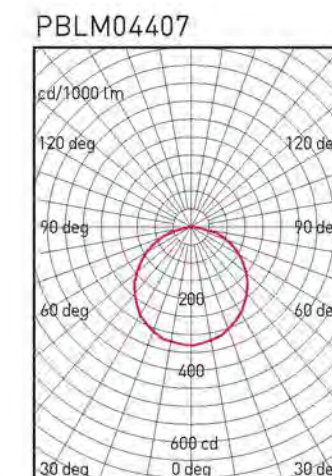

\*Condition Apply





## TECHZONE

Recess mounting Techzone introduce a uniquely clean, simple lighting system offering continuous lighting solution for Armstrong Techzone system

### Application areas


Corporate office | Meeting Room | Corridors | Libraries



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 150-265V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

25W	
4000K	PTZM02254 1750lm
6500K	PTZM02257 2295lm
Weight	2.8kg
Dimension (mm) (L/Dia x W/Dia x H)	1190 x 145 x 100
Cut Out Dimension (mm)	1180 x 135

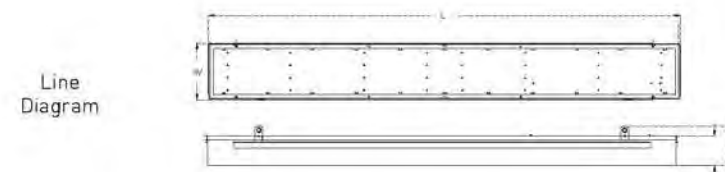


Photometric data

PTZM02257

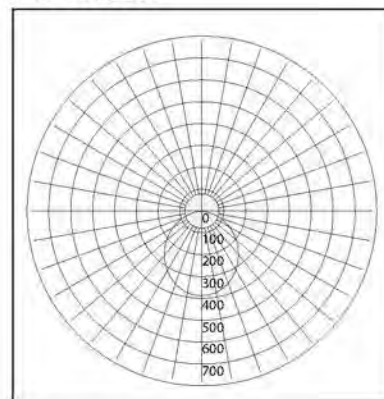

\*Condition Apply

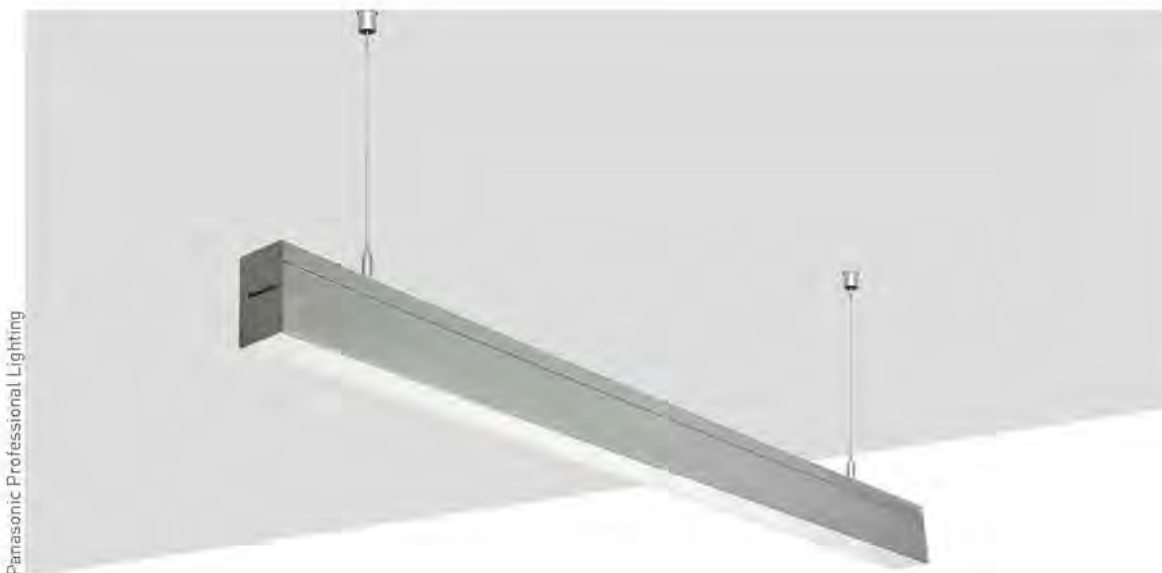

## SUSPENDED LINEAR UP DOWN TYPE

Aesthetically designed LED linear fixture suitable for suspended updown type with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light leakages.

### Application areas

Corporate Offices | Corridors & Libraries | Museums | Meeting room  
Educational Facilities | Reception Area | Modern Workspaces



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- BWF diffuser with push fit technology
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Loop in loop out option [ on request ]
- In-built accessories for continuous linear connection

	40W	65W
3000K	PLHM04403 3720lm	PLHM04653 6045lm
4000K	PLHM04404 3840lm	PLHM04654 6240lm
6000K	PLHM04406 4000lm	PLHM04656 6500lm
Weight	3 kg	3 kg
Dimension (mm) (L/Dia x W/Dia x H)	1200 x 54 x 88	1200 x 54 x 88
Cut Out Dimension (mm)	N/A	N/A




Photometric data

PLHM04406

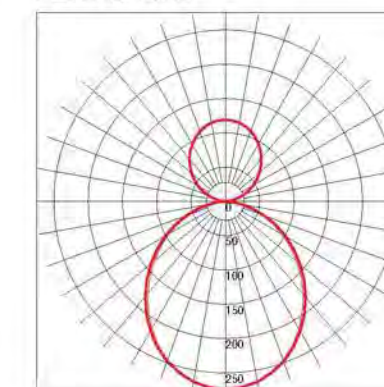

\*Condition Apply



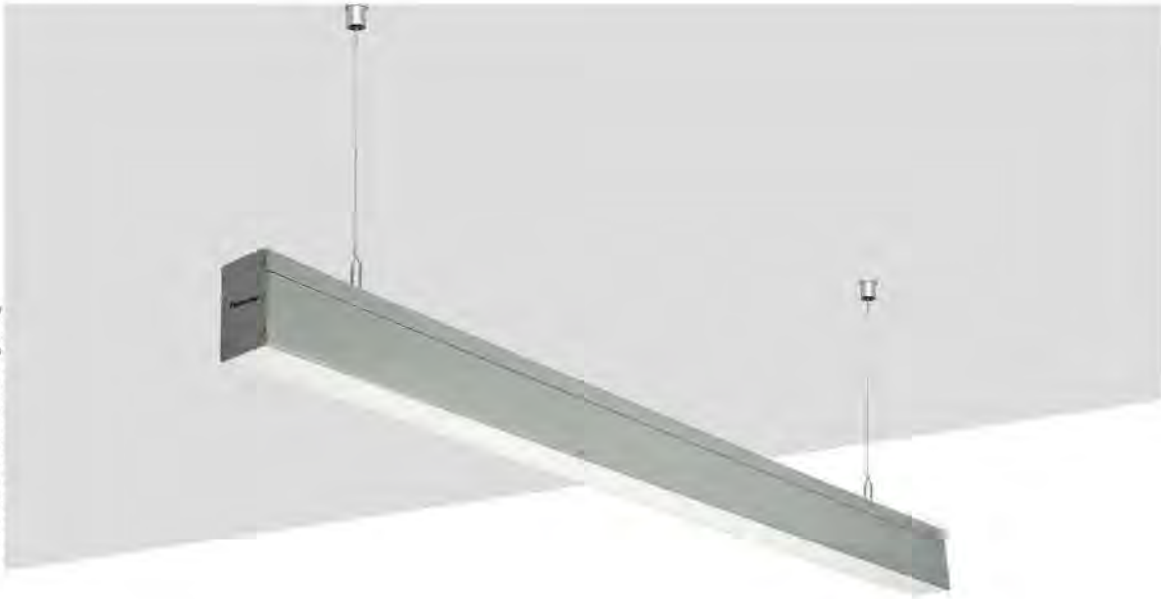

# SUSPENDED LINEAR DOWN TYPE

Aesthetically designed LED linear fixture suitable for suspended down type with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light leakages.

## Application areas


Corporate Offices | Corridors & Libraries | Museums | Meeting room  
Educational Facilites | Reception Area | Modern Workspaces








## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- BWF diffuser with push fit technology
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Loop in loop out option [ on request ]
- In-built accessories for continuous linear connection

	15W	25W	18W	35W	50W
3000K	PLHM01153 1395lm	PLHM01253 2325lm	PLHM01183 1674lm	PLHM01353 3255lm	PLHM01503 4650lm
4000K	PLHM01154 1440lm	PLHM01254 2400lm	PLHM01184 1728lm	PLHM01354 3360lm	PLHM01504 4800lm
6500K	PLHM01156 1500lm	PLHM01256 2500lm	PLHM01186 1800lm	PLHM01356 3500lm	PLHM01506 5000lm
Weight	1.5 kg	3 kg	1.5 kg	3 kg	6.5 kg
Dimension (mm) (L/Dia x W/Dia x H)	600 x 54 x 88	1200 x 54 x 88	600 x 54 x 88	1200 x 54 x 88	2390 x 54 x 88
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A	N/A

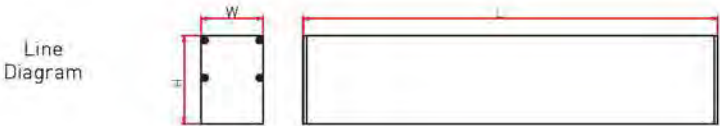


Photometric data

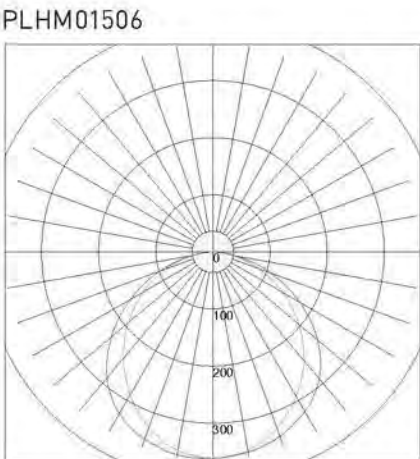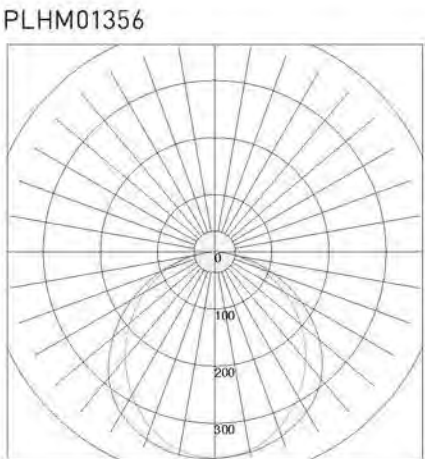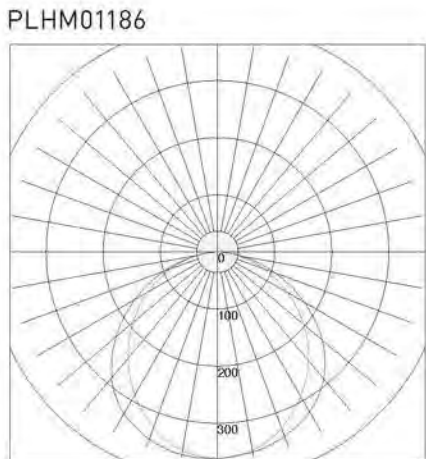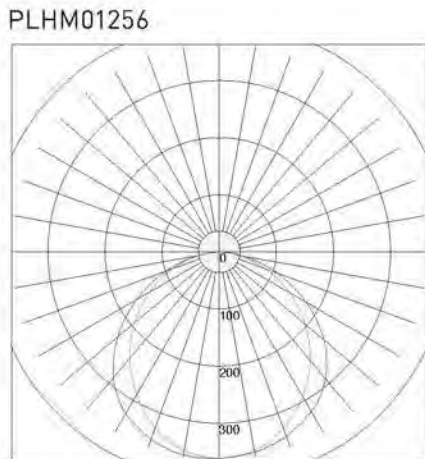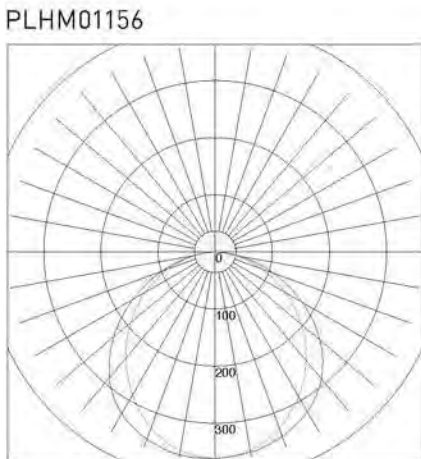

Note : 15W is Compatible with 25W & 18W is Compatible with 35W for proper uniformity.

\*Condition Apply



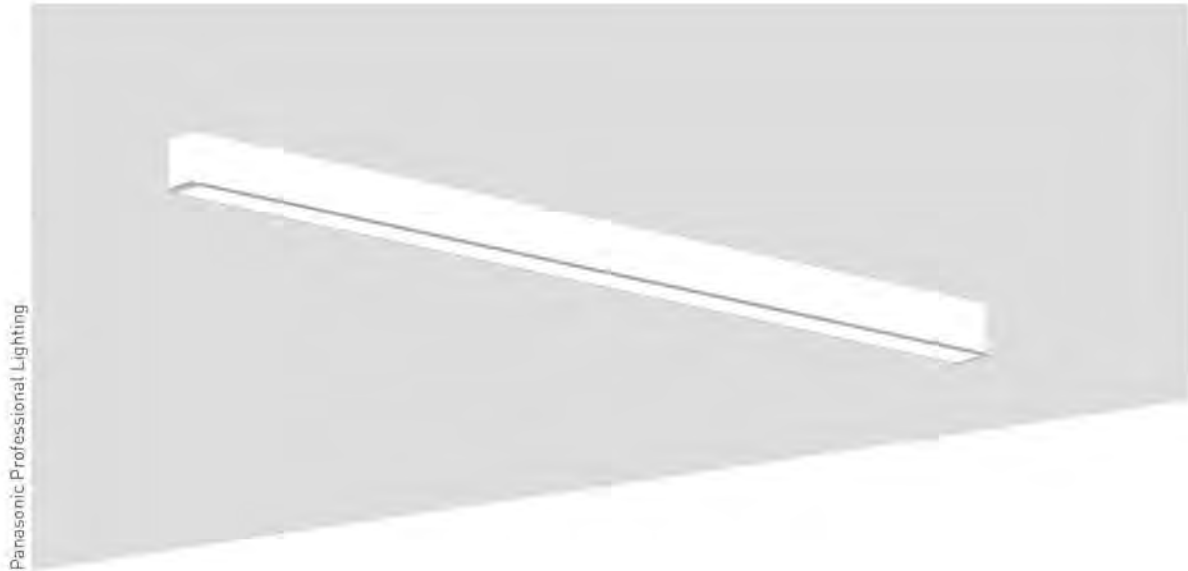

# RECESSED LINEAR FIXTURE

Aesthetically designed LED linear fixture with housing made of high quality extruded aluminium alloy including die-cast aluminium end cap. These series are also available with seamless continuous lighting system ensuring no visible dark spot or light gaps.

## Application areas






Offices | Corridors & Libraries | Museums | Meeting room  
Educational Facilites | Reception Area



## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- BWF diffuser with push fit technology
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Loop in loop out option [ on request ]
- In-built accessories for continuous linear connection

	15W	25W	18W	35W
3000K	PLRM01153 1395lm	PLRM01253 2325lm	PLRM01183 1674lm	PLRM01353 3255lm
4000K	PLRM01154 1440lm	PLRM01254 2400lm	PLRM01184 1728lm	PLRM01354 3360lm
6500K	PLRM01156 1500lm	PLRM01256 2500lm	PLRM01186 1800lm	PLRM01356 3500lm
Weight	1.4 kg	1.8 kg	1.4 kg	1.8 kg
Dimension (mm) (L/Dia x W/Dia x H)	620 x 69 x 71	1200 x 69 x 71	620 x 69 x 71	1200 x 69 x 71
Cut Out Dimension (mm)	605 x 55	1205 x 55	605 x 55	1205 x 55

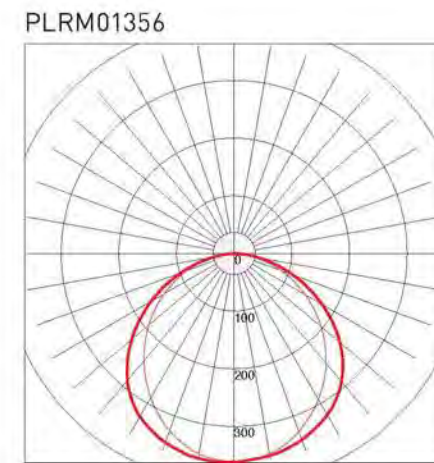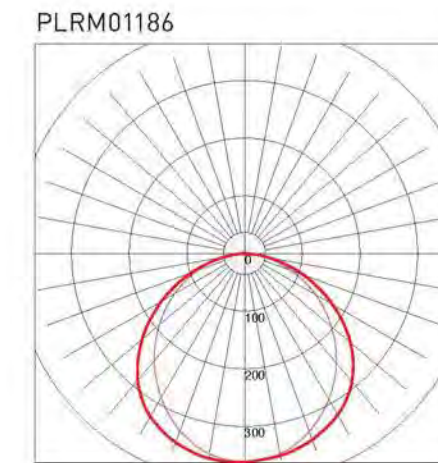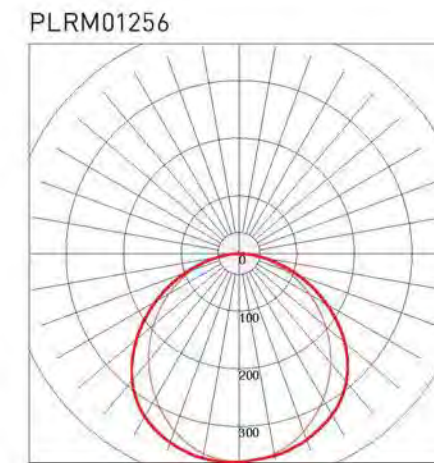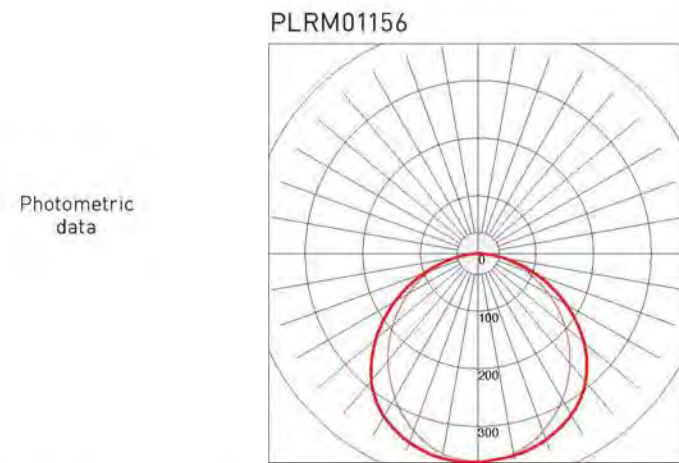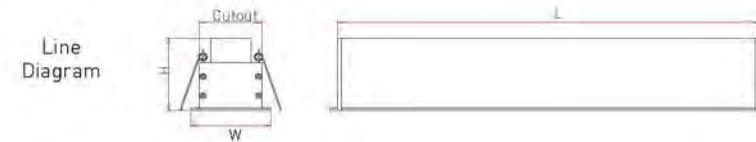

Note : 15W is Compatible with 25W & 18W is Compatible with 35W for proper uniformity.

\*Condition Apply





# ALUMINIUM DOWN LIGHT

New Recess mounting circular LED downlight luminaire with aluminium housing in white PC finish, specially designed heat sink, anti glare diffuser and integrated energy efficient electronic driver





## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-295V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High Quality polycarbonate frosted diffuser for glare-free uniform lighting distribution
- No harmful UV and IR radiations
- Operating Temperature : -10°C to +45°C

## Application areas


Retail Store | Corporate Offices | Corridors  
Gym /Spa | Showrooms | Restaurants | Hotels

	5W	8W	12W	14W	20W
3000K	PDLM03053 420lm	PDLM03083 720lm	PDLM03123 1100lm	PDLM03143 1270lm	PDLM03203 1960lm
4000K	PDLM03054 440lm	PDLM03084 740lm	PDLM03124 1150lm	PDLM03144 1330lm	PDLM03204 2020lm
6500K	PDLM03057 450lm	PDLM03087 760lm	PDLM03127 1180lm	PDLM03147 1370lm	PDLM03207 2060lm
Weight	0.146kg	0.194kg	0.280kg	0.370kg	0.630kg
Dimension (mm) (L/Dia x W/Dia x H)	92 x - x 63.5	113 x - x 72.5	145 x - x 75	174 x - x 78.5	244 x - x 94.5
Cut Out Dimension (mm)	Ø70	Ø92	Ø130	Ø150	Ø205

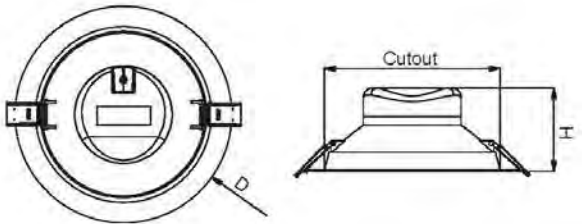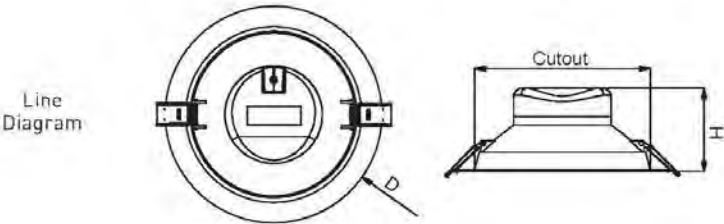


Photometric  
data


PDLM03057

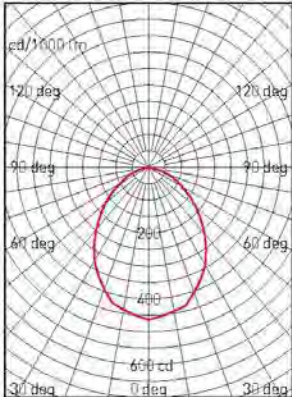


PDLM03087

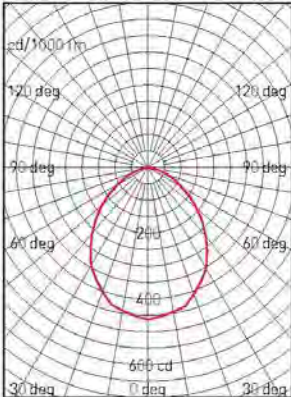


PDLM03127

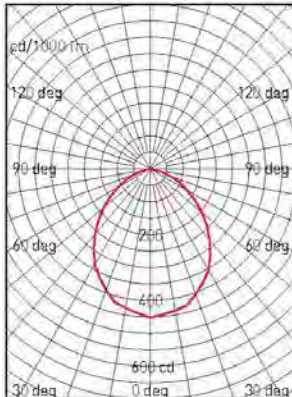

PDLM03147

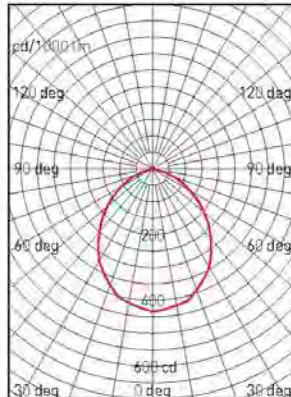

PDLM03207

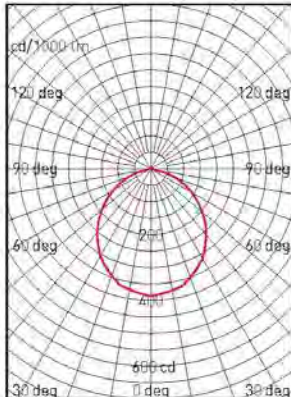





# PC DOWN LIGHT



Recess mounting circular LED downlight luminaire with PC housing, anti-glare diffuser and separate energy efficient electronic driver.

## Product Specification



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-330V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 25000 hrs
- High Quality polycarbonate frosted diffuser for glare-free uniform lighting distribution
- No harmful UV and IR radiations
- Operating Temperature : -10°C to +45°C

## Application areas

Residences | Corporate Offices | Museums | Retail Stores  
Shopping Malls | Airport Lounges Restaurants | Hotels


	5W	10W	15W	20W
3000K	PDLM12053 455lm	PDLM12103 890lm	PDLM12153 1335lm	PDLM12203 1780lm
4000K	PDLM12054 460lm	PDLM12104 920lm	PDLM12154 1380lm	PDLM12204 1840lm
6500K	PDLM12057 500lm	PDLM12107 1000lm	PDLM12157 1500lm	PDLM12207 2000lm
Weight	0.15kg	0.2kg	0.34kg	0.36kg
Dimension (mm) (L/Dia x W/Dia x H)	120 x 120 x 30	150 x 150 x 30	198 x 198 x 30	198 x 198 x 30
Cut Out Dimension (mm)	Ø102	Ø128	Ø178	Ø178

Line  
Diagram

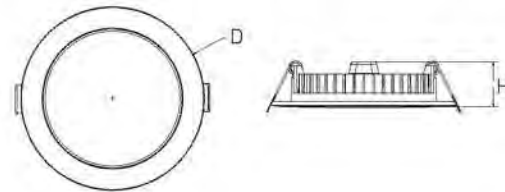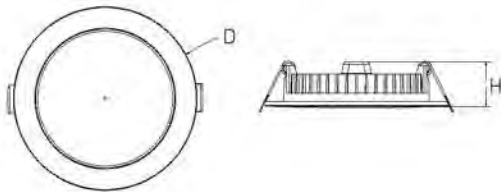


Photometric  
data


PDLM12057

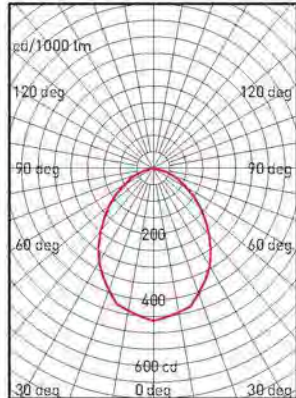


PDLM12107

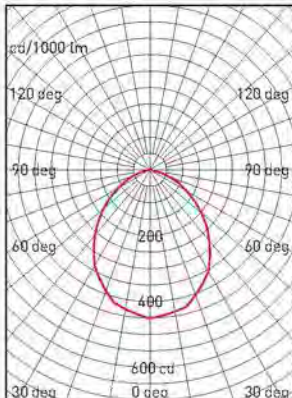

PDLM12157

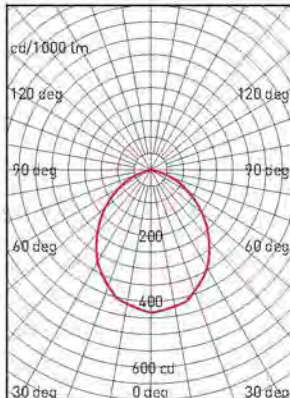

PDLM12207

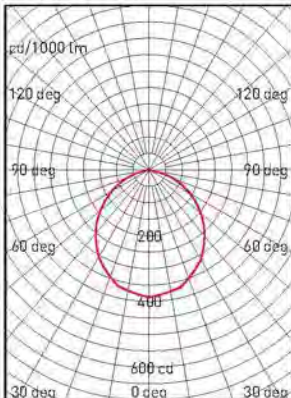





## RETAIL & HOSPITALITY LIGHTING



# HOSPITALITY

In the hospitality industry, lighting plays a vital role in creating the right ambience. We have a host of custom lighting solutions that are perfect for all kinds of hospitality ideas.



**GUEST ROOM**



Glareless DL




COB DL



Glareless DL



Glareless DL

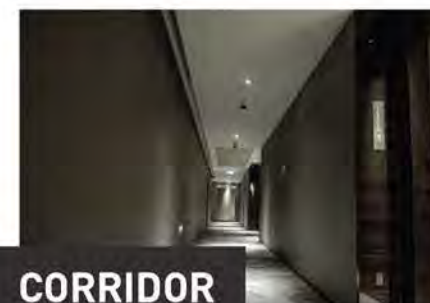

**CORRIDOR**



**BANQUET HALL**



Glareless DL



Glareless DL



**RECEPTION**



Glareless DL




Track Light



Space Player



Base Light

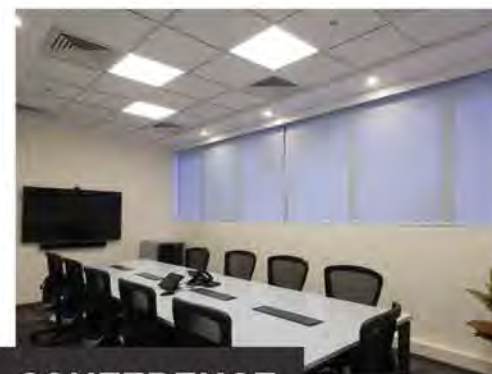


**CONFERENCE**




COB DL



Pin Hole DL

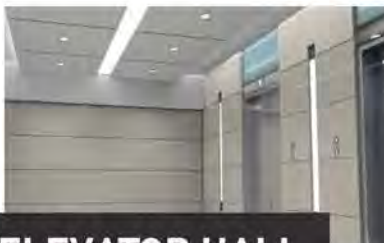

**ELEVATOR HALL**

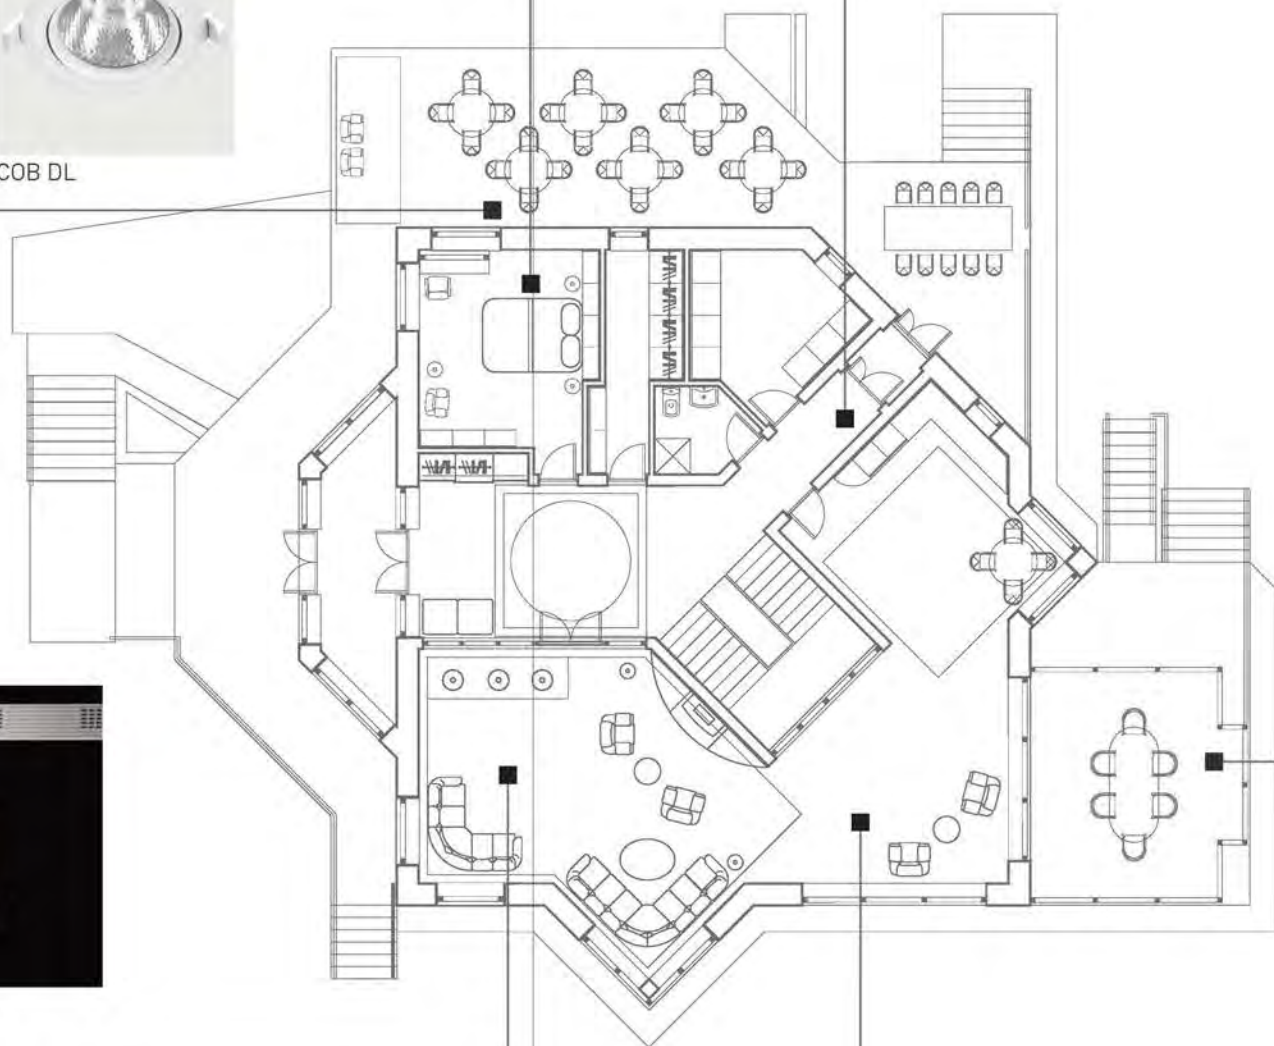





## COB DOWN LIGHT - 24°

Recess mounting circular COB LED downlight with die-cast aluminium housing in white powder coating finish, specially designed heat sink, anti glare diffuser and separate energy efficient electronic driver





### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy aluminium reflector to enhance the lumen output of the fixture
- No harmful UV and IR radiations
- Operating Temperature : -10°C to +45°C
- High efficiency adjustable spotlight

### Application areas


Residences | Corporate Offices | Museums | Retail Stores  
Shopping Malls | Airport Lounges Restaurants | Hotels

	3W	7W	15W	25W	30W	40W
3000K	PDLM07033 285lm	PDLM07073 665lm	PDLM07153** 1425lm	PDLM07253** 2375lm	PDLM07303** 2850lm	PDLM07403** 3800lm
4000K	PDLM07034** 300lm	PDLM07074** 700lm	PDLM07154** 1500lm	PDLM07254** 2500lm	PDLM07304** 3000lm	PDLM07404** 4000lm
6500K	PDLM07036 315lm	PDLM07076 735lm	PDLM07156** 1575lm	PDLM07256** 2625lm	PDLM07306** 3150lm	PDLM07406** 4200lm
Weight	0.15kg	0.15kg	0.40kg	0.37kg	0.72kg	1.05kg
Dimension (mm) (L/Dia x W/Dia x H)	68 x - x 66	85 x - x 62	110 x - x 85	140 x - x 120	160 x - x 125	180 x - x 127
Cut Out Dimension (mm)	Ø55	Ø75	Ø95	Ø125	Ø145	Ø160

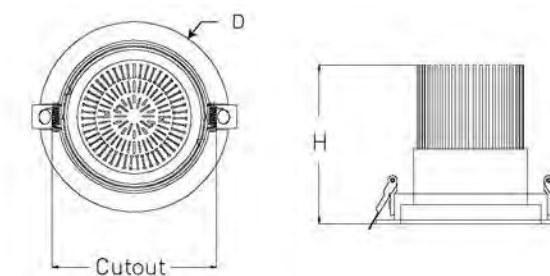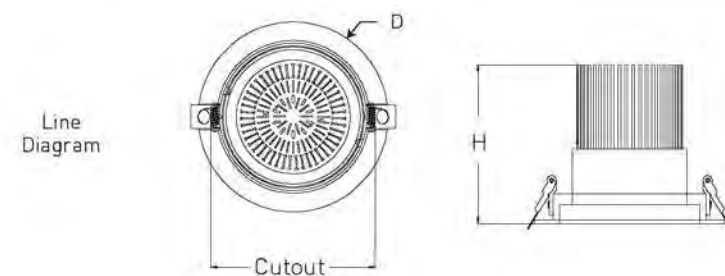


Photometric data


PDLM07036

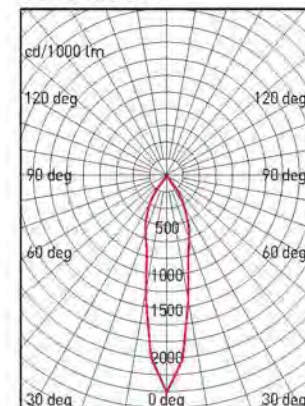


PDLM07076

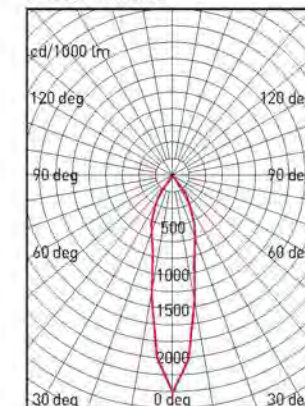


PDLM07156

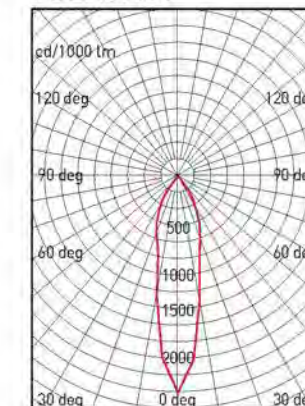


PDLM07256

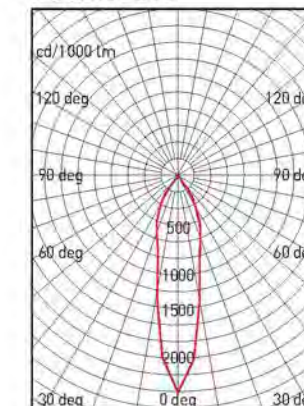

PDLM07306

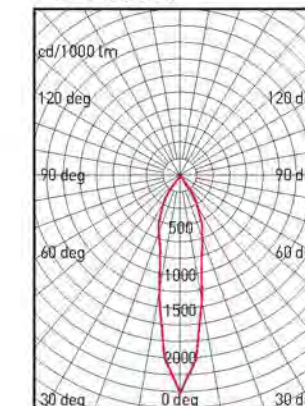

PDLM07406

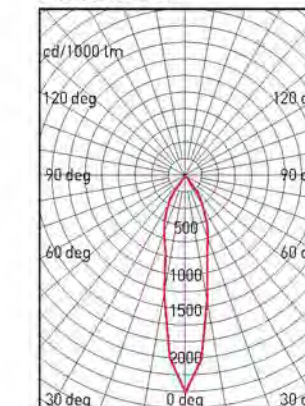

\*\* Make to Order

\*Condition Apply





## COB DOWN LIGHT - 36°

Recess mounting circular COB LED downlight with die-cast aluminium housing in white powder coating finish, specially designed heat sink, anti glare diffuser and separate energy efficient electronic driver





### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy aluminium reflector to enhance the lumen output of the fixture
- No harmful UV and IR radiations
- Operating Temperature : -10°C to +45°C
- High efficiency adjustable spotlight

### Application areas


Residences | Corporate Offices | Museums | Retail Stores  
Shopping Malls | Airport Lounges Restaurants | Hotels

	3W	7W	15W	25W	30W	40W
3000K	PDLM08033** 285lm	PDLM08073** 665lm	PDLM08153 1425lm	PDLM08253** 2375lm	PDLM08303** 2850lm	PDLM08403** 3800lm
4000K	PDLM08034** 300lm	PDLM08074** 700lm	PDLM08154** 1500lm	PDLM08254** 2500lm	PDLM08304** 3000lm	PDLM08404** 4000lm
6500K	PDLM08036** 315lm	PDLM08076** 735lm	PDLM08156 1575lm	PDLM08256** 2625lm	PDLM08306** 3150lm	PDLM08406** 4200lm
Weight	0.15kg	0.15kg	0.40kg	0.37kg	0.72kg	1.05kg
Dimension (mm) (L/Dia x W/Dia x H)	68 x - x 66	85 x - x 62	110 x - x 85	140 x - x 120	160 x - x 125	180 x - x 127
Cut Out Dimension (mm)	Ø55	Ø75	Ø95	Ø125	Ø145	Ø160

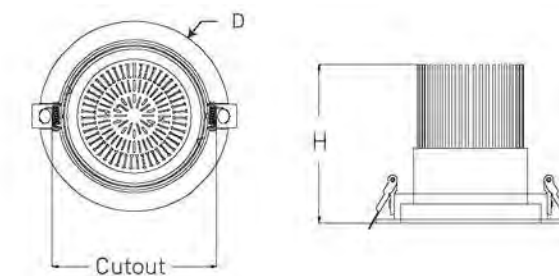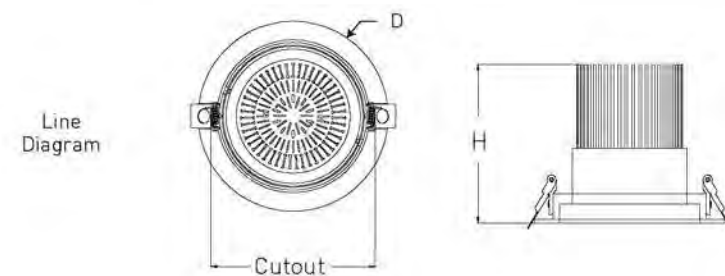


Photometric data


PDLM08036

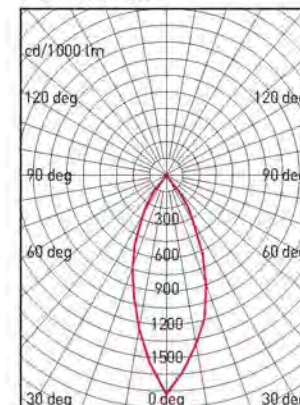


PDLM08076

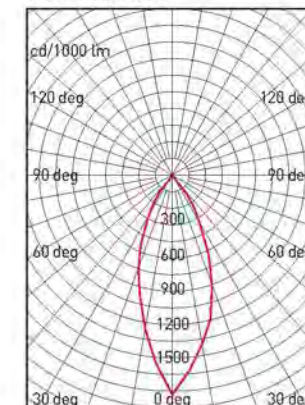


PDLM08156

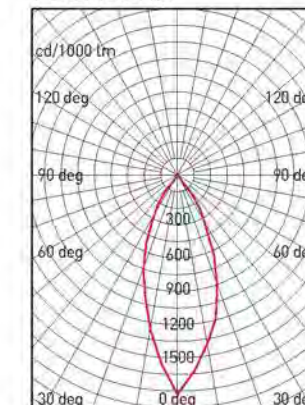


PDLM08256

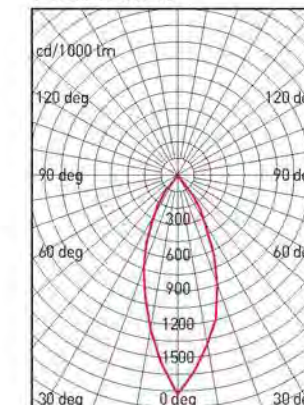

PDLM08306

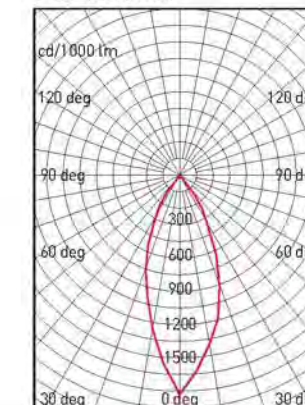

PDLM08406

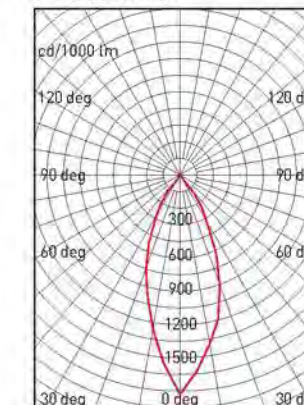

\*\* Make to Order

\*Condition Apply





# COB DOWN LIGHT - 60°

Recess mounting circular COB LED downlight with die-cast aluminium housing in white powder coating finish, specially designed heat sink, anti glare diffuser and separate energy efficient electronic driver




## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy aluminium reflector to enhance the lumen output of the fixture
- No harmful UV and IR radiations
- Operating Temperature : -10°C to +45°C
- High efficiency adjustable spotlight








## Application areas

Residences | Corporate Offices | Museums | Retail Stores  
Shopping Malls | Airport Lounges Restaurants | Hotels

	3W	7W	15W	25W	30W	40W
3000K	PDLM09033** 285lm	PDLM09073** 665lm	PDLM09153 1425lm	PDLM09253 2375lm	PDLM09303 2850lm	PDLM09403 3800lm
4000K	PDLM09034** 300lm	PDLM09074** 700lm	PDLM09154** 1500lm	PDLM09254** 2500lm	PDLM09304** 3000lm	PDLM09404** 4000lm
6500K	PDLM09036** 315lm	PDLM09076** 735lm	PDLM09156 1575lm	PDLM09256 2625lm	PDLM09306 3150lm	PDLM09406 4200lm
Weight	0.15kg	0.15kg	0.40kg	0.37kg	0.72kg	1.05kg
Dimension (mm) (L/Dia x W/Dia x H)	68 X - X 66	85 X - X 62	110 X - X 85	140 X - X 120	160 X - X 125	180 X - X 127
Cut Out Dimension (mm)	Ø55	Ø75	Ø95	Ø125	Ø145	Ø160

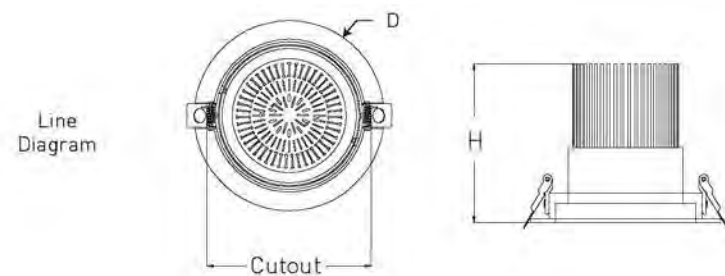

Photometric data

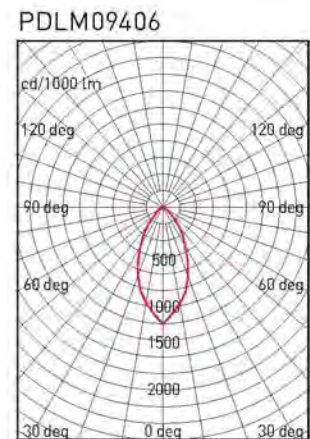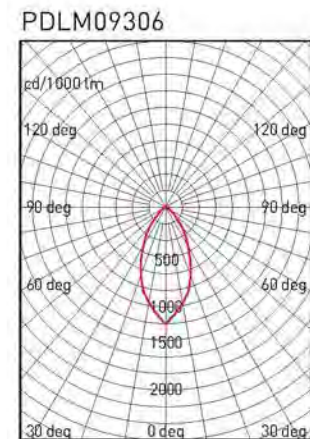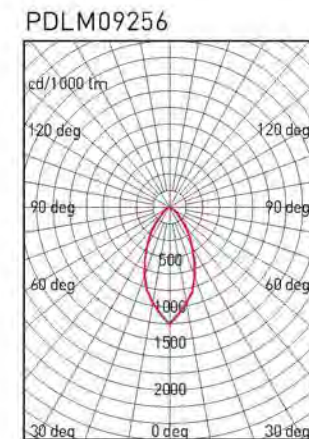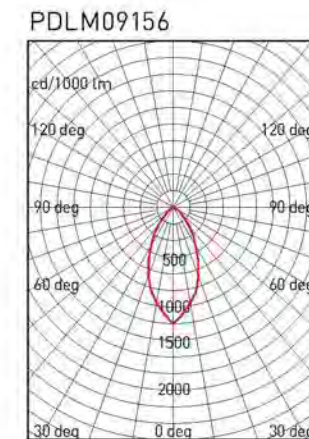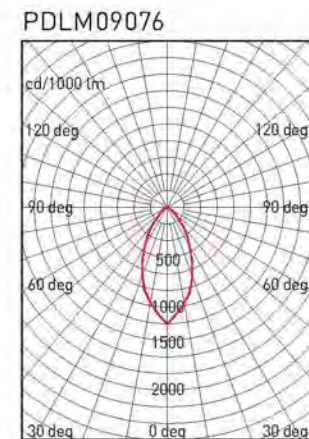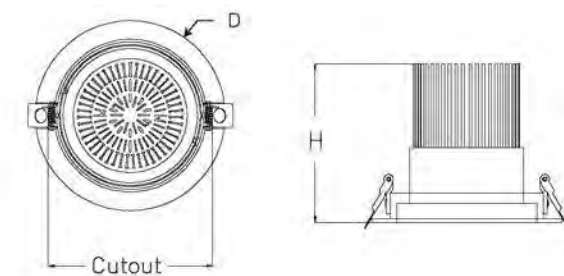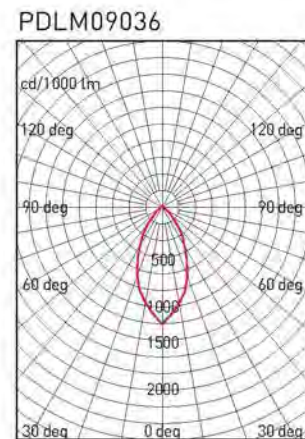

\*\* Make to Order

\*Condition Apply





## IP65 DOWN LIGHT



Water Proof Recess mounting Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy aluminium reflector
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Confirm to IES safety standards [IEC 60598, IEC 61347]

### Application areas

Showrooms | Restaurants | Hotels  
Malls | Bathrooms


8W	
3000K	ADL27R083 350lm
Weight	0.18kg
Dimension (mm) (L/Dia x W/Dia x H)	60 x 60 x 65
Cut Out Dimension (mm)	Ø50

Line  
Diagram

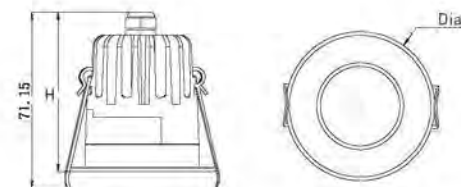

ADL27R083

Photometric  
data

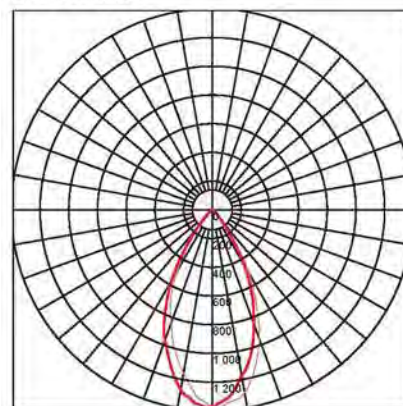

\*Condition Apply



## ADJUSTABLE DOWN LIGHT



Recess Mounting Adjustable type Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy aluminium reflector
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Confirm to IES safety standards [IEC 60598, IEC 61347]

### Application areas

Showrooms | Restaurants | Hotels  
Malls | Reception Area


28W	
3000K	ADL17R283 2100lm
4000K	ADL17R284 2100lm
Weight	0.72kg
Dimension (mm) (L/Dia x W/Dia x H)	125 x 125 x 154
Cut Out Dimension (mm)	Ø125

Line  
Diagram

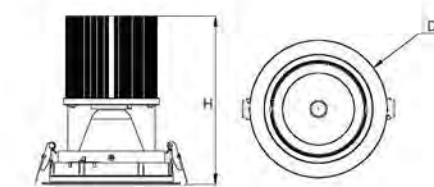

ADL17R284

Photometric  
data

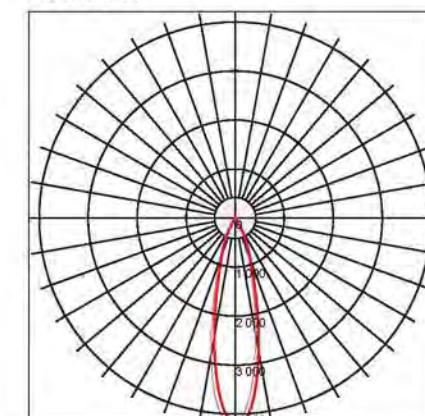

\*Condition Apply





## TRIMLESS DOWN LIGHT ADJUSTABLE

Recess Mounting Glareless Adjustable type Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.

### Application areas


Showrooms | Restaurants | Reception Area  
Hotels | Malls



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy faceted aluminium reflector
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Confirm to IES safety standards (IEC 60598, IEC 61347)

12W	
3000K	ADL21R123 720lm
Weight	0.32kg
Dimension (mm) (L/Dia x W/Dia x H)	100 x 100 x 120
Cut Out Dimension (mm)	Ø90

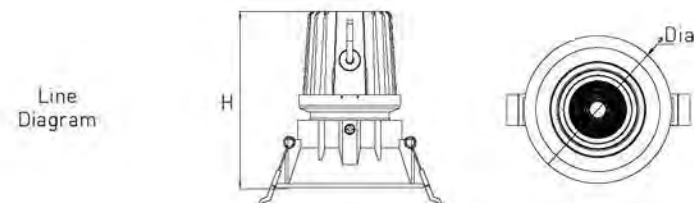

ADL20R123

Photometric  
data

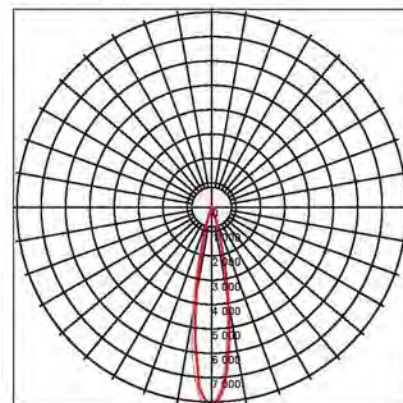

\*Condition Apply



## TRIM DOWN LIGHT

Recess Mounting Glareless Adjustable Type Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.

### Application areas


Showrooms | Restaurants | Reception Area  
Hotels | Malls



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy faceted aluminium reflector
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Confirm to IES safety standards (IEC 60598, IEC 61347)

15W	
3000K	ADL21R153 1225lm
Weight	0.96kg
Dimension (mm) (L/Dia x W/Dia x H)	140 x 140 x 150
Cut Out Dimension (mm)	Ø130

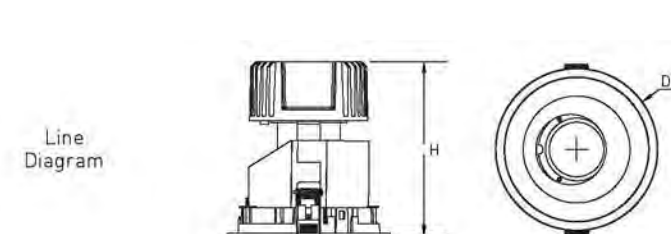

ADL19R153

Photometric  
data

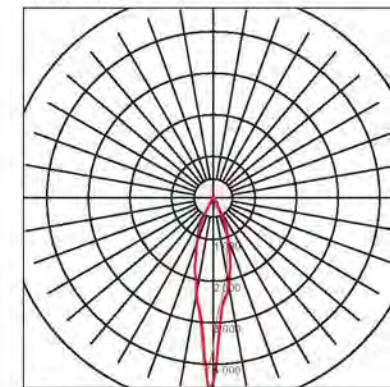

\*Condition Apply





## PIN HOLE ADJUSTABLE DOWN LIGHT

Recess Mounting Pin Hole Type Adjustable Circular LED Luminaire with die-cast aluminum housing in white electrophoresis finish, specially designed heat sink and separate energy efficient electronic driver.

### Application areas

Showrooms | Restaurants  
Hotels | Malls




### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- High Performance electronic driver ensure Zero Maintenance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High purity anodized glossy facetted aluminium reflector
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Confirm to IES safety standards (IEC 60598, IEC 61347)


12W	
3000K	ADL25R123 720lm
Weight	0.32kg
Dimension (mm) (L/Dia x W/Dia x H)	90 x 90 x 105
Cut Out Dimension (mm)	Ø80

Line  
Diagram

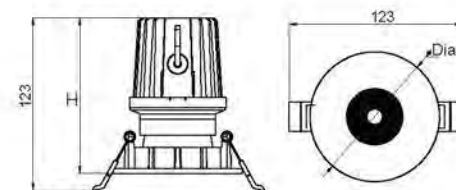

ADL25R123

Photometric  
data

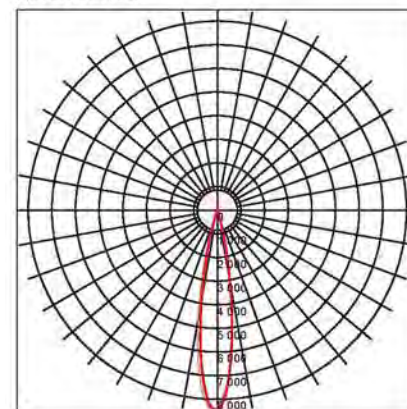

\*Condition Apply



## TRACK LIGHT

Aesthetically designed LED track light luminaire equipped with aluminium die-cast housing,

### Application areas

Restaurants | Hotel Lobby | Retail Store | Art Galleries | Museum




### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-400V
- High performance electronic driver ensures zero maintenance
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- High purity anodized glossy facetted aluminium reflector
- No harmful UV & IR radiations
- Operating temperature: -10°C to +45°C

	10W	20W
3000K	ATR020103 750lm	ATR020203 1500lm
6000K	ATR020106 800lm	ATR020206 1600lm
Weight	0.3kg	0.5kg
Dimension (mm) (L/Dia x W/Dia x H)	186 x 60 x 212	186 x 90 x 245
Cut Out Dimension (mm)	N/A	N/A
Track	Surface type, 1m	Recess type, 1m
	ATR02S000	ATR02R000
L x W x H (mm)	1000 x 65 x 15	1000 x 35 x 15

Line  
Diagram



Photometric  
data

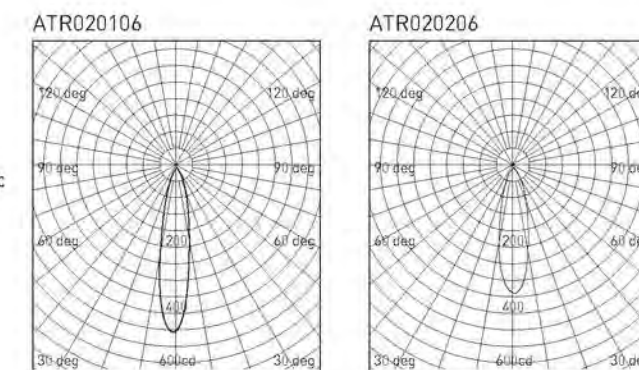


\*Condition Apply



# INDUSTRIAL LIGHTING





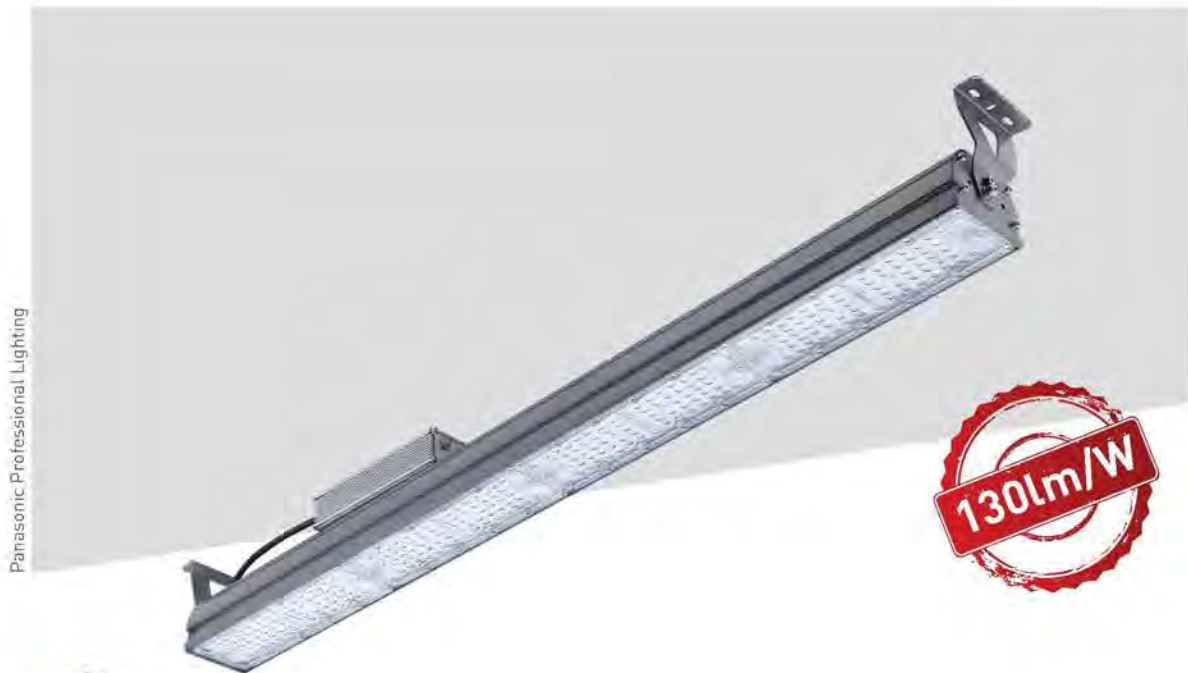

**NEW**

# LINEAR HIGHBAY LIGHT - 60°

Ascetically designed robust and reliable linear LED luminaire with specially designed heat sink and reliable non-integrated IP 67 energy efficient electronic driver . IP 65 linear highbay , provide a highly productive and safe environment to increase work efficiency.









## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-305V
- High performance IP67 electronic driver ensures zero maintenance
- Potted driver is used for vibration proof performance
- High Surge Protection : 6KV
- Average life L70B50: 50,000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating temperature: -10°C to +50°C


## Application areas

Auto Ancillary | Manufacturing Plant  
Warehouse | Parking Area | Conveyor Belt.

	90W	120W	150W	180W
5700K	PBYM07908 11700lm	PBYM07CD8 15600lm	PBYM07FG8 19500lm	PBYM07KL8 23400lm
Weight	2.5 kg	3.5 kg	4.35 kg	4.6 kg
Dimension (mm) (L/Dia x W/Dia x H)	490 x 80 x 123	730 x 80 x 123	970 x 80 x 123	970 x 80 x 123
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A

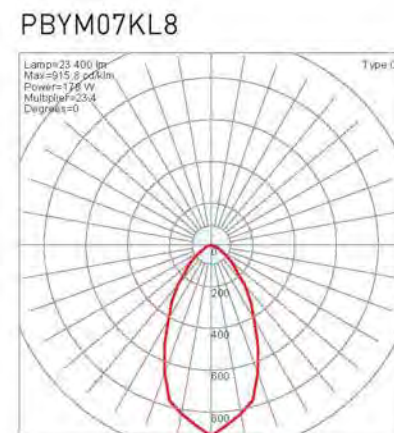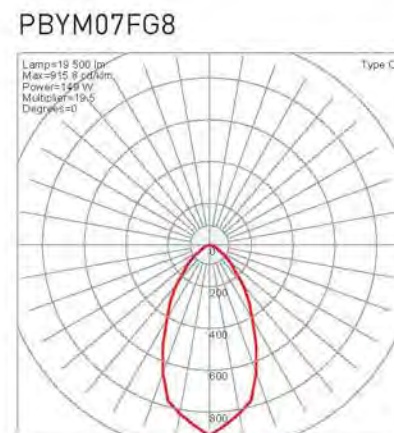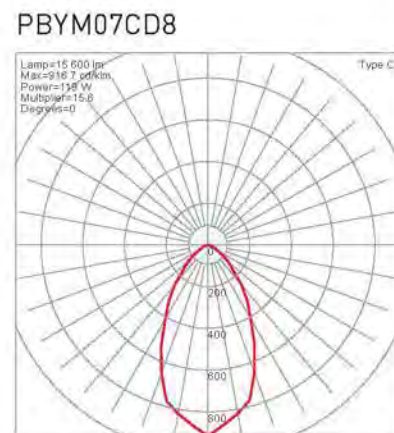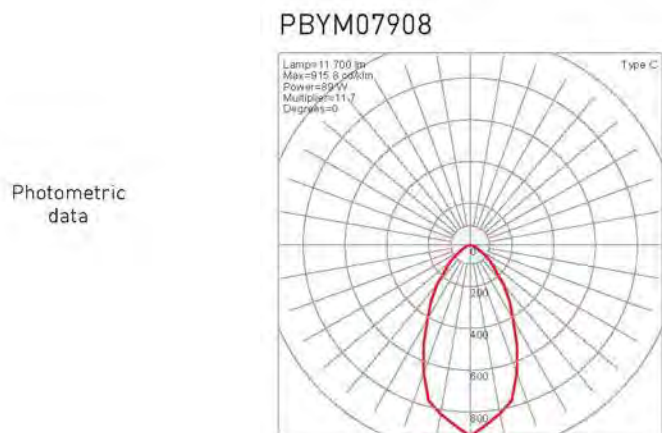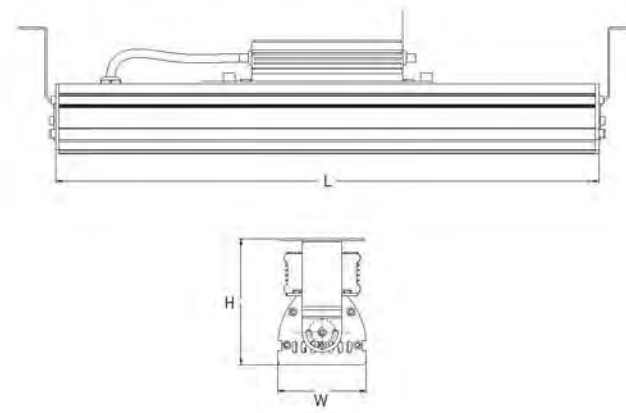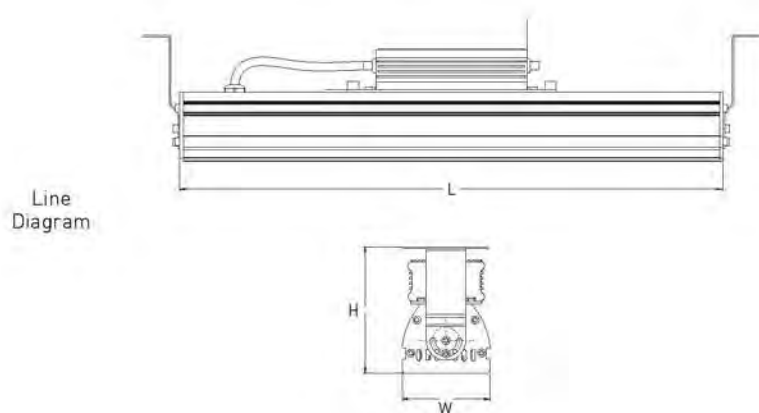



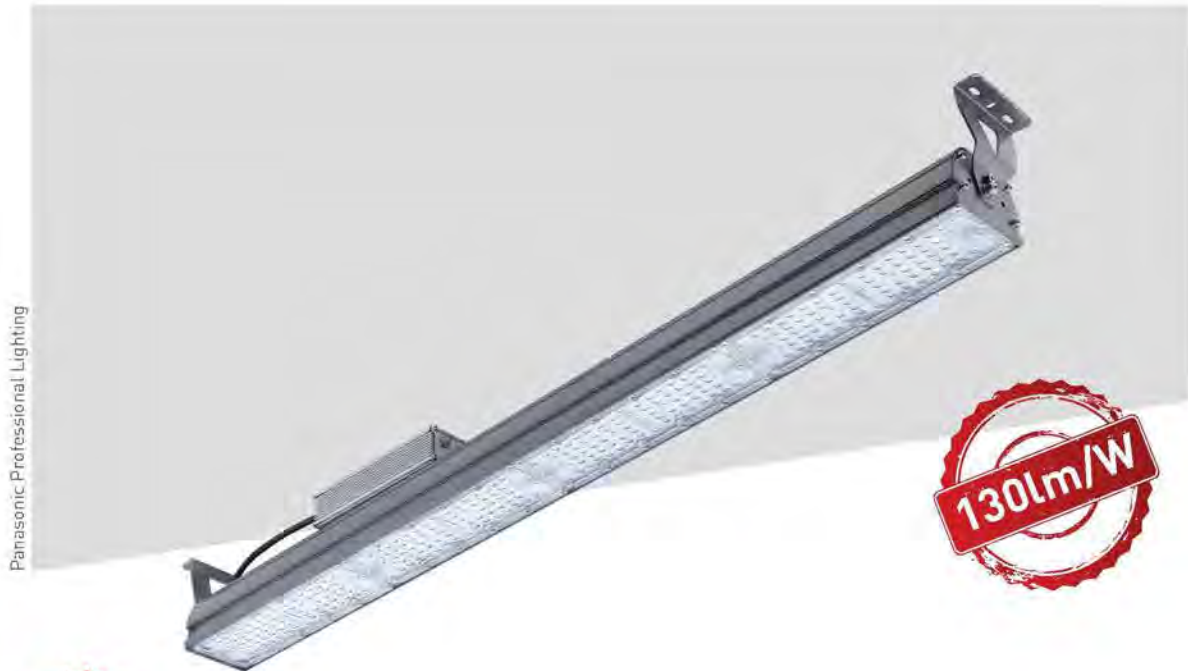

**NEW**

# LINEAR HIGHBAY LIGHT - 90°

Ascetically designed robust and reliable linear LED luminaire with specially designed heat sink and reliable non-integrated IP 67 energy efficient electronic driver . IP 65 linear highbay , provide a highly productive and safe environment to increase work efficiency.

90°

Ra70

IP65

IK09







## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-305V
- High performance IP67 electronic driver ensures zero maintenance
- Potted driver is used for vibration proof performance
- High Surge Protection : 6KV
- Average life L70B50: 50,000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating temperature: -10°C to +50°C

## Application areas

Auto Ancillary | Manufacturing Plant  
Warehouse | Parking Area | Conveyor Belt.

	90W	120W	150W	180W
5700K	PBYM08908 11700lm	PBYM08CD8 15600lm	PBYM08FG8 19500lm	PBYM08KL8 23400lm
Weight	2.5 kg	3.5 kg	4.35 kg	4.6 kg
Dimension (mm) (L/Dia x W/Dia x H)	490 x 80 x 123	730 x 80 x 123	970 x 80 x 123	970 x 80 x 123
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A

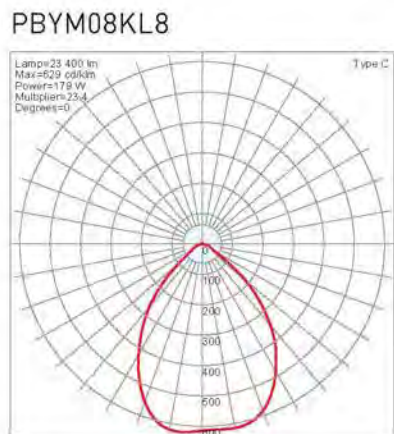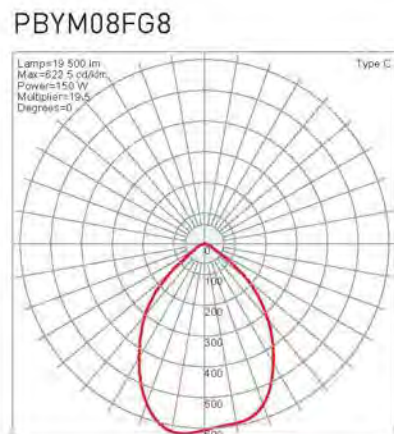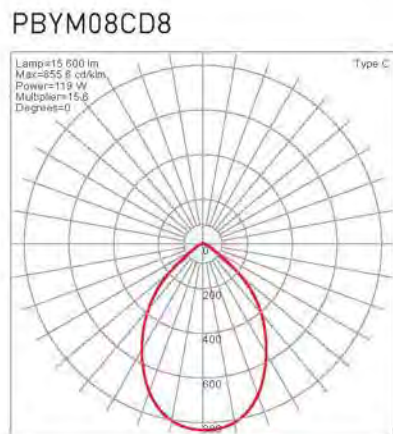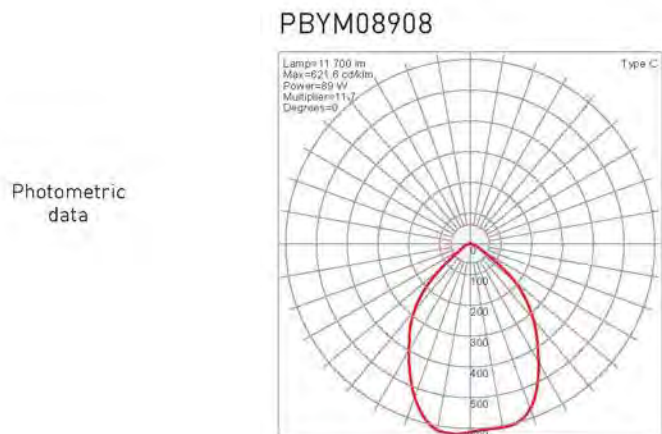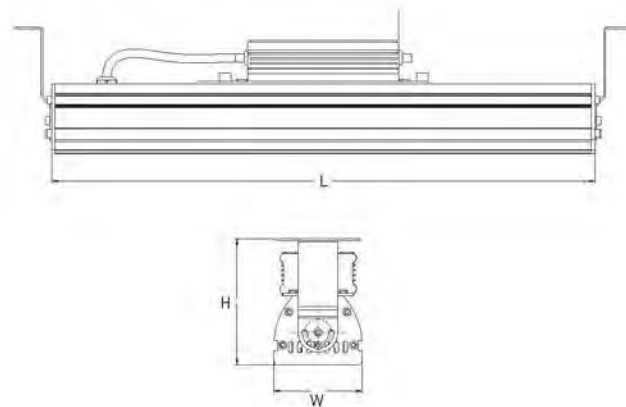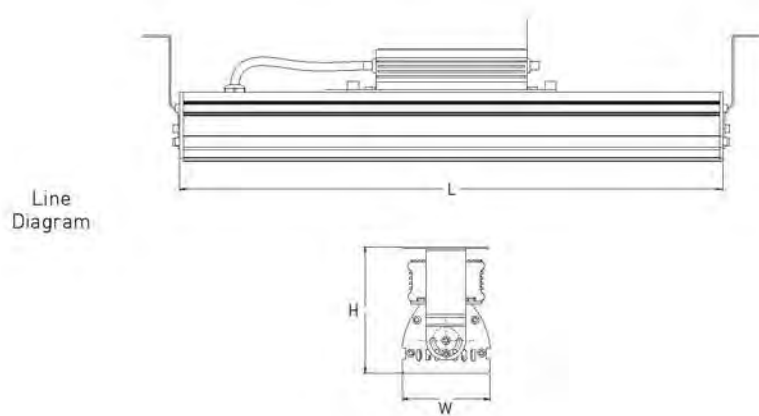





**CIRCULAR BAY  
LIGHT - 60°**

Ascetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requiment across Industrial application.



**Product Specification**



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 127-300V
- High Performance electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

**Application areas**

Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza


	80W	100W	120W	150W	180W
5700K	PBYM09808 11600lm	PBYM09AB8 14500lm	PBYM09CD8 17400lm	PBYM09FG8 21750lm	PBYM09KL8 26100lm
Weight	2.98 kg	3.15 kg	3.35 kg	3.45 kg	3.55 kg
Dimension (mm) (L/Dia x W/Dia x H)	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A	N/A

Line  
Diagram

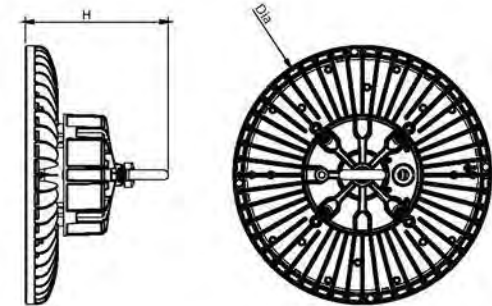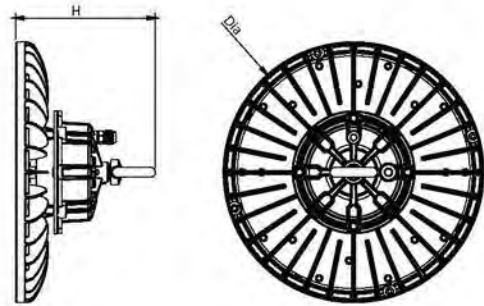

Photometric  
data

PBYM09808

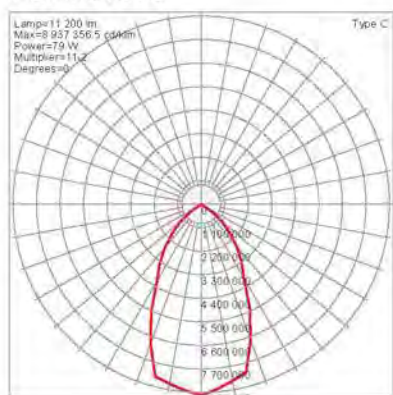





**CIRCULAR BAY  
LIGHT - 90°**

Ascetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient driver to meet the different requiment across Industrial application.



**Product Specification**


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 127-300V
- High Performance electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

**Application areas**

Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza


	80W	100W	120W	150W	180W
5700K	PBYM10808 11600lm	PBYM10AB8 14500lm	PBYM10CD8 17400lm	PBYM10FG8 21750lm	PBYM10KL8 26100lm
Weight	2.98 kg	3.15 kg	3.35 kg	3.45 kg	3.55 kg
Dimension (mm) (L/Dia x W/Dia x H)	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171	318.5 x 318.5 x 171
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A	N/A

Line  
Diagram

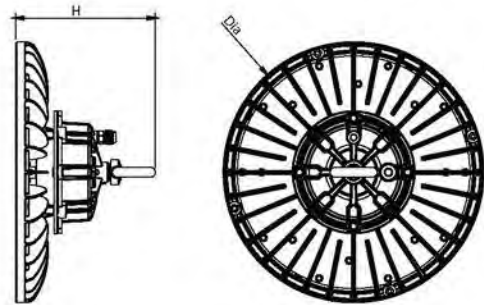


Photometric  
data


PBYM10808

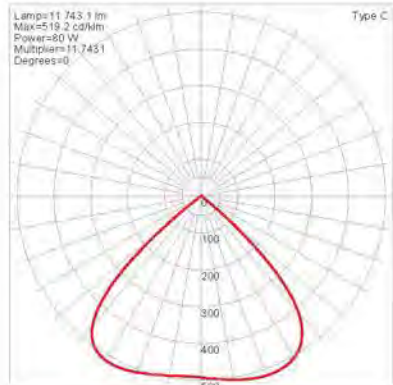


PBYM10AB8

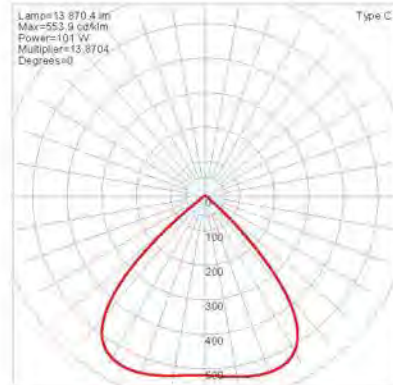


PBYM10CD8

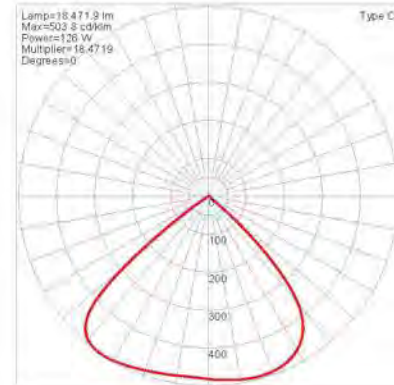

PBYM10FG8

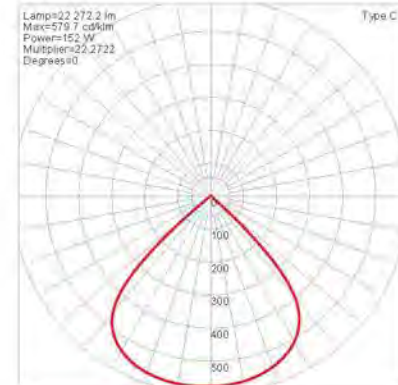

PBYM10KL8

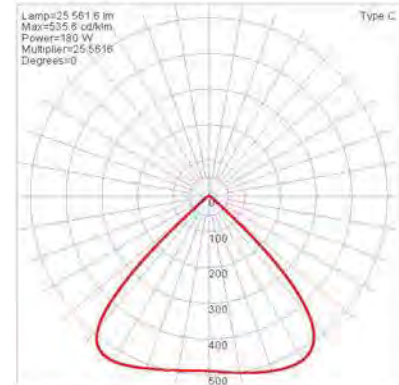





# SUSPENDED HIGH BAY - 60°

Ascetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across Industrial application suitable for easy replacement of conventional HID lamps.



## Product Specification



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High performance electronic driver ensures zero maintenance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- Aluminium spun reflector for uniform distribution
- No harmful UV & IR radiations
- Operating temperature: -10°C to +45°C

## Application areas

Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza


	90W	120W	150W	180W
4000K	PBYM01904 9000lm	PBYM01CD4 12000lm	PBYM01FG4 15000lm	PBYM01KL4 18000lm
6500K	PBYM01907 9900lm	PBYM01CD7 13200lm	PBYM01FG7 16500lm	PBYM01KL7 19800lm
Weight	3.5kg	3.5kg	4kg	5.2kg
Dimension (mm) (L/Dia x W/Dia x H)	345 x - x 384	345 x - x 384	345 x - x 413	345 x - x 463
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A

Line  
Diagram

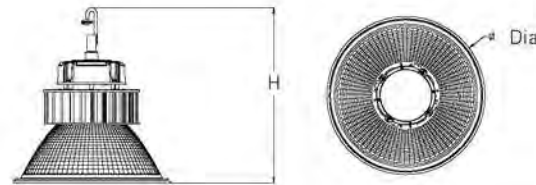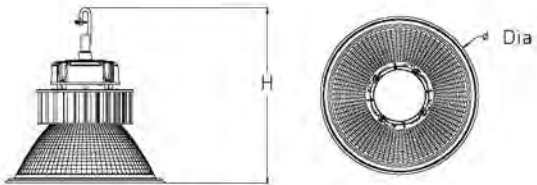


Photometric  
data


PBYM01907

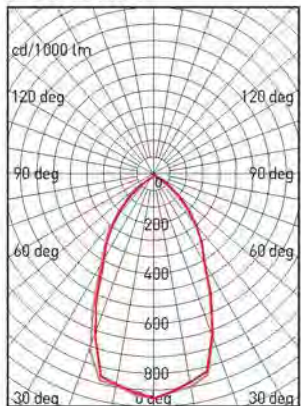


PBYM01CD7

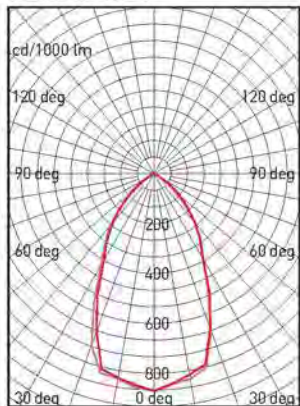

PBYM01FG7

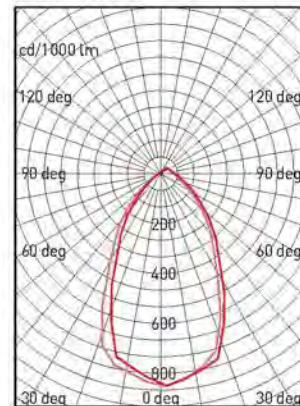

PBYM01KL7

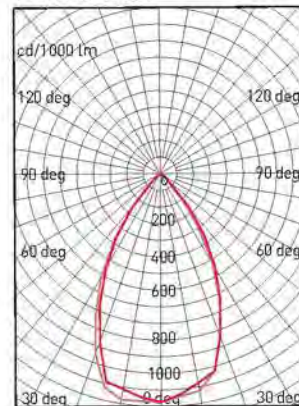





# SUSPENDED HIGH BAY - 90°

Ascetically designed robust LED high bay equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across Industrial application suitable for easy replacement of conventional HID lamps.



## Product Specification



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High performance electronic driver ensures zero maintenance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- Aluminium spun reflector for uniform distribution
- No harmful UV & IR radiations
- Operating temperature: -10°C to +45°C

## Application areas

Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza


	90W	120W	150W	180W
4000K	PBYM02904 9000lm	PBYM02CD4 12000lm	PBYM02FG4 15000lm	PBYM02KL4 18000lm
6500K	PBYM02907 9900lm	PBYM02CD7 13200lm	PBYM02FG7 16500lm	PBYM02KL7 19800lm
Weight	3.5kg	3.5kg	4kg	5.2kg
Dimension (mm) (L/Dia x W/Dia x H)	345 x - x 384	345 x - x 384	345 x - x 413	345 x - x 463
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A

Line  
Diagram

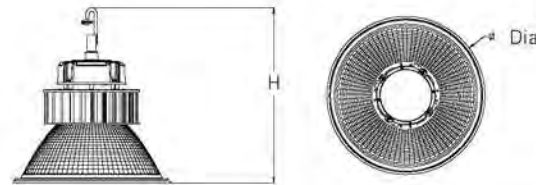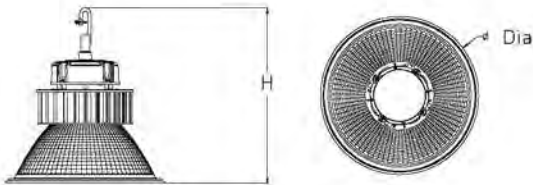


Photometric  
data


PBYM02907

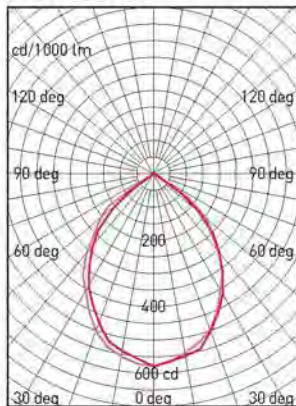


PBYM02CD7

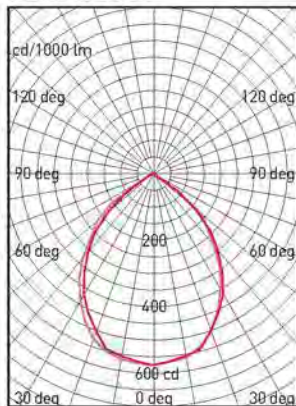

PBYM02FG7

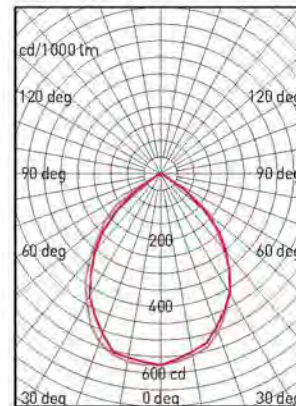

PBYM02KL7

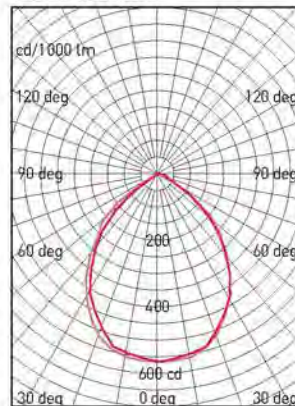





## HIGH BAY MODULE LIGHT - 60°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

50W	
4000K	PBYM04504 6250lm
6500K	PBYM04507 6750lm
Weight	1.92 kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 80 x 265
Cut Out Dimension (mm)	N/A

Line  
Diagram



Photometric  
data

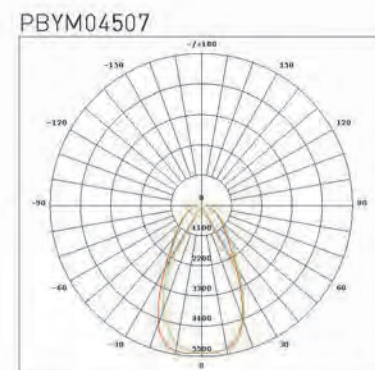

\*\*3000K and 120° will be available on demand

\*Condition Apply



## HIGH BAY MODULE LIGHT - 90°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

50W	
4000K	PBYM05504 6250lm
6500K	PBYM05507 6750lm
Weight	1.92 kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 80 x 265
Cut Out Dimension (mm)	N/A

Line  
Diagram

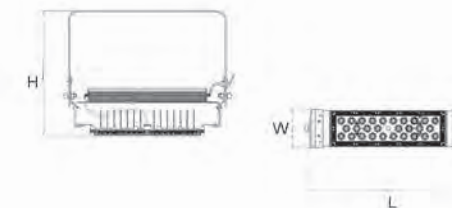

Photometric  
data

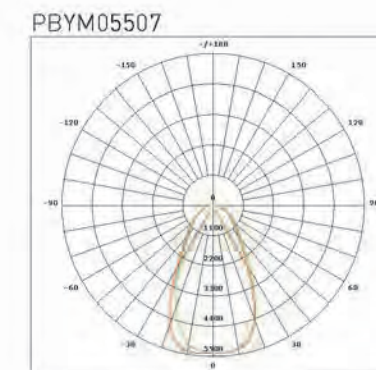

\*\*3000K and 120° will be available on demand

\*Condition Apply





## HIGH BAY MODULE LIGHT - 60°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

	90W	120W
4000K	PBYM04904 11250lm	PBYM04CD4 15000lm
6500K	PBYM04907 12150lm	PBYM04CD7 16200lm
Weight	3.16kg	3.16kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 162 x 265	355 x 162 x 265
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram

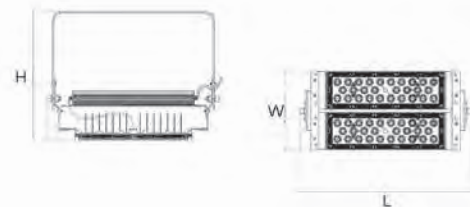

Photometric  
data



\*\*3000K and 120° will be available on demand

\*Condition Apply



## HIGH BAY MODULE LIGHT - 90°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

	90W	120W
4000K	PBYM05904 11250lm	PBYM05CD4 15000lm
6500K	PBYM05907 12150lm	PBYM05CD7 16200lm
Weight	3.16kg	3.16kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 162 x 265	355 x 162 x 265
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram

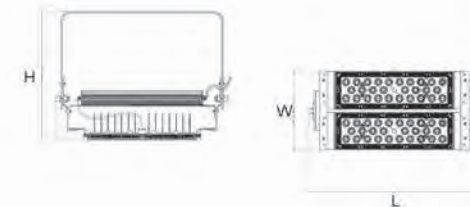

Photometric  
data



\*\*3000K and 120° will be available on demand

\*Condition Apply





## HIGH BAY MODULE LIGHT - 60°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

	150W	180W
4000K	PBYM04FG4 18750lm	PBYM04KL4 22500lm
6500K	PBYM04FG7 20250lm	PBYM04KL7 24300lm
Weight	3.91kg	3.91kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 250 x 265	355 x 250 x 265
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram

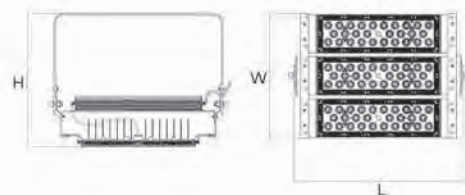

PBYM04FG7



Photometric  
data

\*\*3000K and 120° will be available on demand

\*Condition Apply



## HIGH BAY MODULE LIGHT - 90°



Aesthetically designed robust LED high bay light, equipped with specially designed heat sink and reliable non-integrated energy efficient electronic driver to meet the different lighting requirement across industrial application suitable for easy replacement of conventional HID lamps.

### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High Performance IP67 electronic driver ensure Zero Maintainance
- Potted driver is used for vibration proof performance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Multiple angle adjustment option in luminaries

### Application areas


Factories & Assembly Line | Cement & Steel Plants  
Medium Industrial Units | Toll Plaza

	150W	180W
4000K	PBYM05FG4 118750lm	PBYM05KL4 22500lm
6500K	PBYM05FG7 20250lm	PBYM05KL7 24300lm
Weight	3.91kg	3.91kg
Dimension (mm) (L/Dia x W/Dia x H)	355 x 250 x 265	355 x 250 x 265
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram

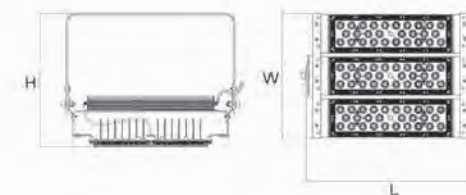

PBYM05KL7



Photometric  
data

\*\*3000K and 120° will be available on demand

\*Condition Apply





## CLEANROOM BOTTOM OPENING

IP 54, dust free & Zero maintenance LED Clean Room Bottom opening luminaire with CRCA powered coating housing, anti glare diffuser with potentiometric integrated energy efficient electronic driver.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 150-265V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

### Application areas

Pharmaceutical Industries | Chemical & Biological Lab | Semiconductor Fabrication | Food & Beverage Industries | Hospital


	45W	60W
4000K	PCRM01454 4050lm	PCRM01604 5400lm
5700K	PCRM01458 4500lm	PCRM01608 6000lm
Weight	6.8kg	6.8kg
Dimension (mm) (L/Dia x W/Dia x H)	655 x 600 x 75	655 x 600 x 75
Cut Out Dimension (mm)	575 x 575	575 x 575

Line  
Diagram

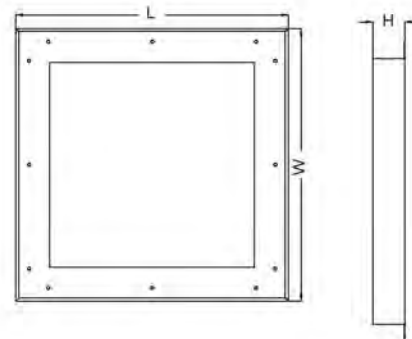

Photometric  
data

PCRM01458

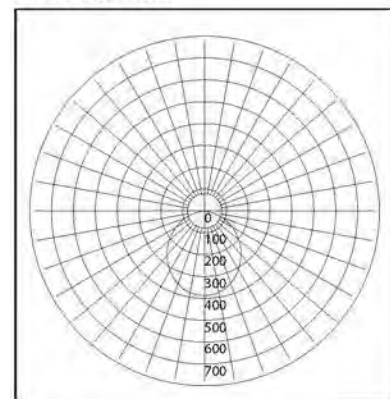

\*Condition Apply



## CLEANROOM TOP OPENING

IP 65, dust free & Zero maintenance LED Clean Room Top opening luminaire with CRCA powered coating housing, anti glare diffuser with potentiometric integrated energy efficient electronic driver.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 150-265V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 2.5KV
- Average Life L70B50 : 50000 hrs
- High transmittance PMMA diffuser for glare-free symmetric light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

### Application areas

Pharmaceutical Industries | Chemical & Biological Lab | Semiconductor Fabrication | Food & Beverage Industries | Hospital


	45W	60W
4000K	PCRM02454 4050lm	PCRM02604 5400lm
5700K	PCRM02458 4500lm	PCRM02608 6000lm
Weight	6kg	6kg
Dimension (mm) (L/Dia x W/Dia x H)	600 x 600 x 70	600 x 600 x 70
Cut Out Dimension (mm)	570 x 570	570 x 570

Line  
Diagram

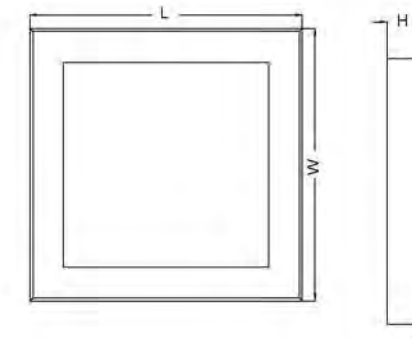

Photometric  
data

PCRM02458

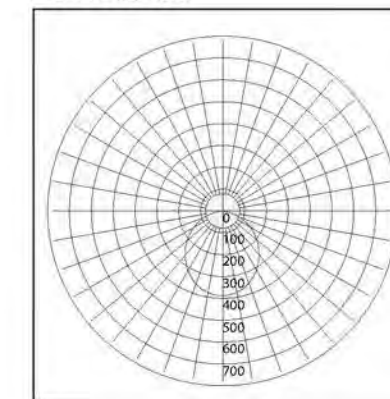

\*\*IP65 from front after installation

\*Condition Apply





## INDUSTRIAL BATTEN - IP20

LED CRCA Batten with inbuilt heat sink, anti-glare polycarbonate diffuser and energy efficient electronic driver.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : PC diffuser for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C

### Application areas

Factory & Assembly line | Warehouses | Parking Area  
Battery Room | Retail Chain | Railway Platform | Chiller Plants


	20W	40W
4000K	PBTM04204 2100lm	PBTM04404 4200lm
6500K	PBTM04207 2200lm	PBTM04407 4400lm
Weight	1.85 kg	1.85 kg
Dimension (mm) (L/Dia x W/Dia x H)	1183 x 53 x 68	1183 x 53 x 68
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram



PBTM04407

Photometric  
data

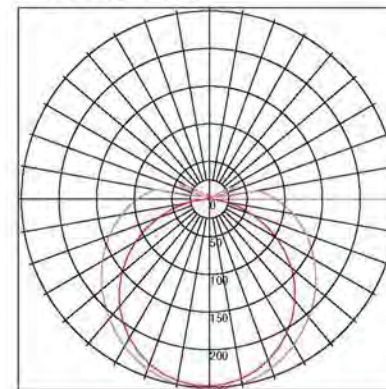

\*Condition Apply



## INDUSTRIAL BATTEN - IP65

LED Batten with inbuilt heat sink, polycarbonate housing equipped with anti-glare diffuser & energy efficient electronics driver



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : PC diffuser for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Loop in Loop out ( on request)
- Screwless technology

### Application areas

Factory & Assembly line | Warehouses | Parking Area  
Battery Room | Retail Chain | Railway Platform | Chiller Plants


	20W	40W
4000K	PBTM05204 2080lm	PBTM05404 4160lm
6500K	PBTM05207 2200lm	PBTM05407 4400lm
Weight	1.5 kg	1.5 kg
Dimension (mm) (L/Dia x W/Dia x H)	1200 x 85 x 80	1200 x 85 x 80
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram



PBTM05407

Photometric  
data

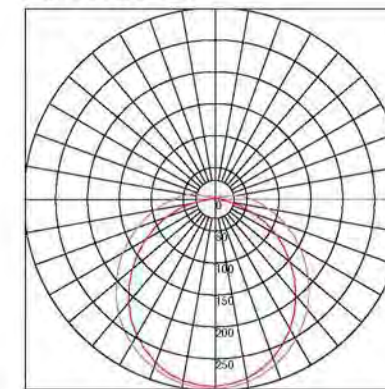

\*Condition Apply





NEW

## WELL GLASS

Aesthetically designed robust LED well glass, equipped with specially designed heat sink and reliable integrated energy efficient electronic driver to meet the different lighting requirement across industrial application, suitable for easy replacement of conventional HID lamps.

### Application areas

Cement Plants | Oil Processing Factories  
Coal Mines | Medium Industrial Unit




### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : PC diffuser for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C
- Loop in loop out [ on request]




Line Diagram



	35W	70W
5700K	PWGM01358 3850lm	PWGM01708 7700lm
5700K ( Milky Diffuser )	PWGM02358 3500lm	PWGM02708 7000lm
Weight	1.5 kg	2.2 kg
Dimension (mm) (L/Dia x W/Dia x H)	165 x 200	215 x 270
Cut Out Dimension (mm)	N/A	N/A

PWGM01407

Photometric data

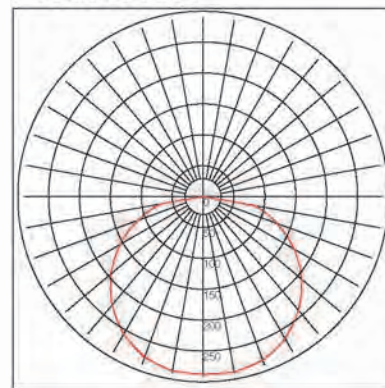

\*Condition Apply



## BULK HEAD

Ceiling and Wall mount LED bulk head serves as an excellent energy efficient alternative to CFL/ incandescent bulkhead luminaires.

### Application areas


Lawns | Gardens | Pathway  
Courtyard | Factories



### Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 100-300V
- High Performance electronic driver ensure Zero Maintainance
- High Surge Protection : 4KV
- Average Life L70B50 : 50000 hrs
- Optics : PC diffuser for better light distribution
- No harmful UV & IR radiations
- Operating Temperature : -10°C to +45°C


Line Diagram

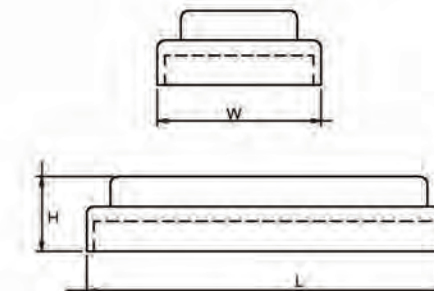

	10W
6500K	PBHM01107 850lm
Weight	0.25 kg
Dimension (mm) (L/Dia x W/Dia x H)	232 x 105 x 50
Cut Out Dimension (mm)	N/A

PBHM01107

Photometric data

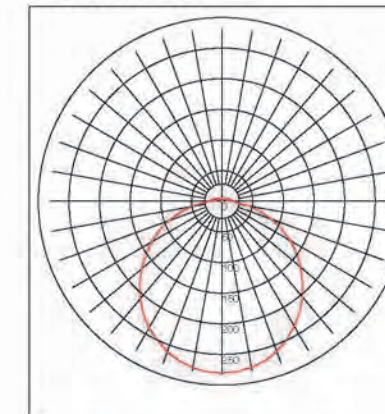

\*Condition Apply



# OUTDOOR LIGHTING







# STREET LIGHT

LED Street Light with innovative & aesthetic & robust design with aluminium heat sink and toughened glass (IP66)

## Application areas



Parking Area | Road Lighting | IT Parks  
Residential Colonies | Internal Road



## Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 140-280V
- High performance electronic driver ensures zero maintenance
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- Optics : Lens for better light distribution
- No harmful UV & IR radiations
- Operating temperature: -10°C to +50°C
- 10KV SPD optional

	70W	90W	120W	150W	180W
5700K	PSTM08708 8050lm	PSTM08908 10350lm	PSTM08CD8 13800lm	PSTM08FG8 17250lm	PSTM08KL8 20700lm
Weight	4.6 kg	4.6 kg	5.1 kg	5.1 kg	5.1 kg
Dimension (mm) (L/Dia x W/Dia x H)	364 x 182 x 102	364 x 182 x 102	475 x 230 x 108	556 x 262 x 116	550 x 262 x 122
Pole Outer Dia (mm)	52	52	54	60	65
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A	N/A

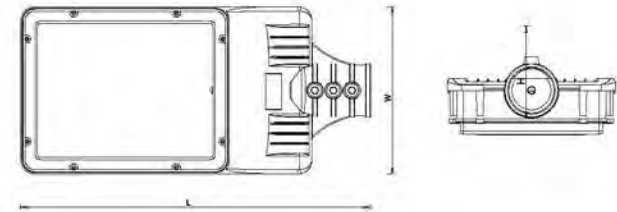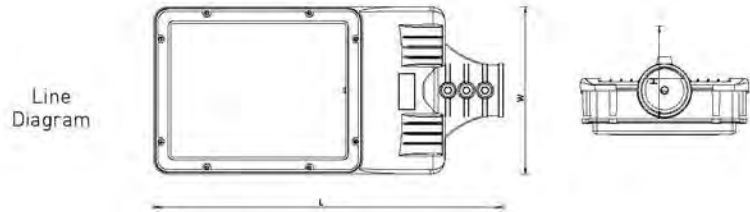


Photometric data


PSTM08708

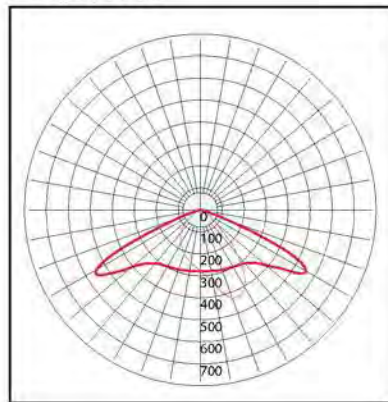


PSTM08908

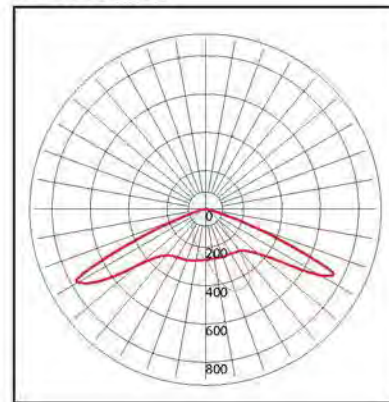


PSTM08CD8

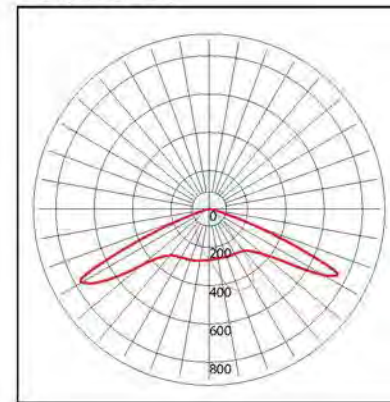

PSTM08FG8

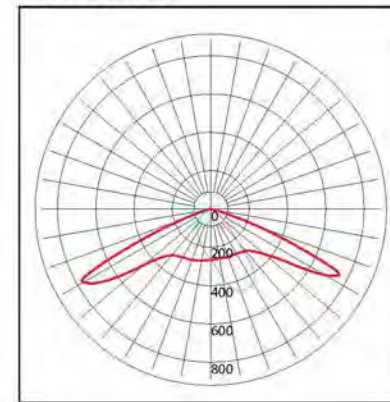

PSTM08KL8

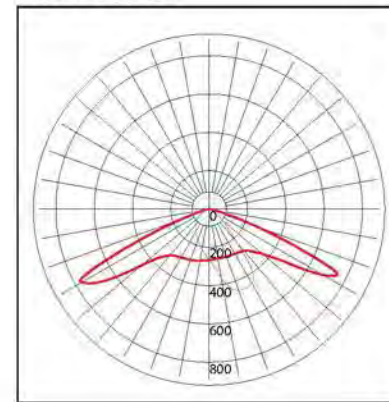





# FLOOD LIGHT

Ascetically designed LED Flood Light Luminaire equipped with specially designed heat sink, reliable integrated energy efficient electronic driver, suitable for easy replacement of conventional flood light.

## Application areas



Signboards | Buildings & Monuments | Billboards  
Shopboards | Factories & Assembly Lines  
Security & Perimeter Lighting




## Product Specification

- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 90-305V
- High performance electronic driver ensures zero maintenance
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- PMMA modular lens plate
- No harmful UV & IR radiations
- Operating temperature: -10°C to +45°C


	50W	90W	120W	150W	180W	200W
3000K	PFLM01503 4250lm	PFLM01903 7650lm	PFLM01CD3 10200lm	PFLM01FG3 12750lm	PFLM01KL3 15300lm	PFLM01MN3 17000lm
6500K	PFLM01506 5000lm	PFLM01906 9000lm	PFLM01CD6 12000lm	PFLM01FG6 15000lm	PFLM01KL6 18000lm	PFLM01MN6 20000lm
Weight	1.8kg	3.9kg	4.8kg	6.75kg	7.15kg	7.15kg
Dimension (mm) (L/Dia x W/Dia x H)	311 x 220 x 50	355 x 245 x 55	403 x 295 x 60	431 x 330 x 60	470 x 360 x 60	470 x 360 x 60
Cut Out Dimension (mm)	N/A	N/A	N/A	N/A	N/A	N/A

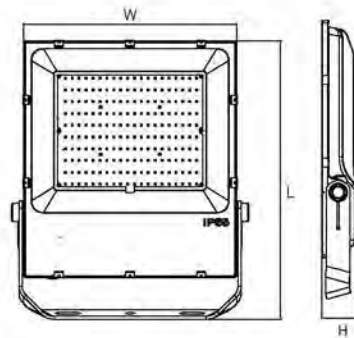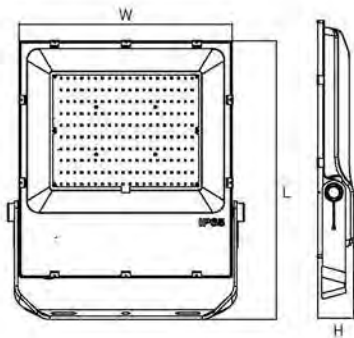


PFLM01506

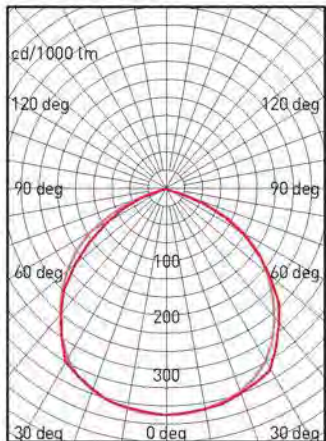


PFLM01906

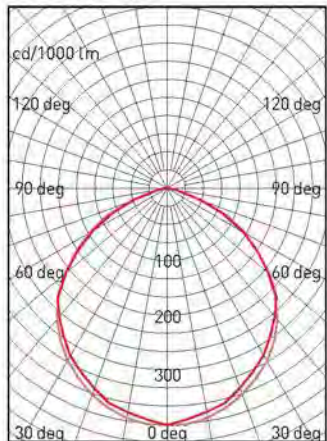


PFLM01CD6

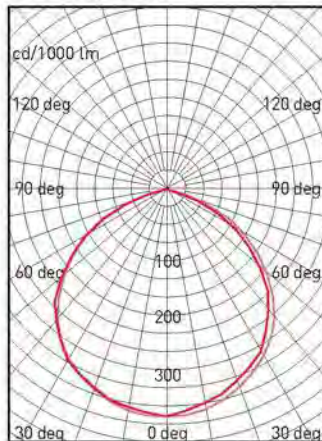


PFLM01FG6

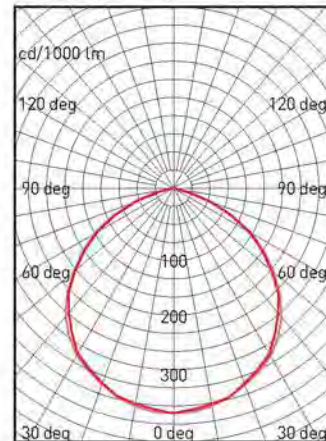

PFLM01KL6

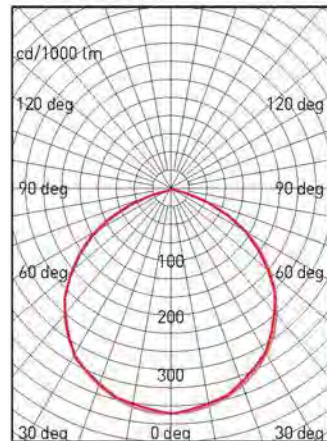

PFLM01MN6

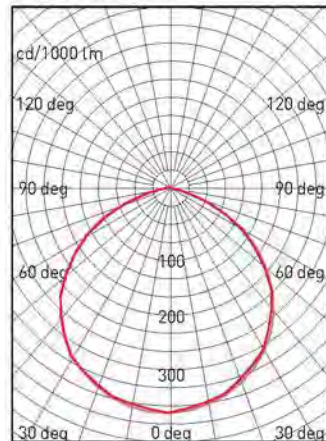





## POST TOP

Decorative, Robust and reliable LED post Top with aluminum housing offers uniform Light distribution, high durability and IP65 Protection.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas


Garden lighting | Path ways | Landscape area

	25W	40W
3000K	APT010253 2750lm	APT010403 4400lm
4000K	APT010254 2870lm	APT010404 4610lm
Weight	8kg	8kg
Dimension (mm) (L/Dia x W/Dia x H)	450 x 442 x 495	450 x 442 x 495
Cut Out Dimension (mm)	N/A	N/A

Line  
Diagram

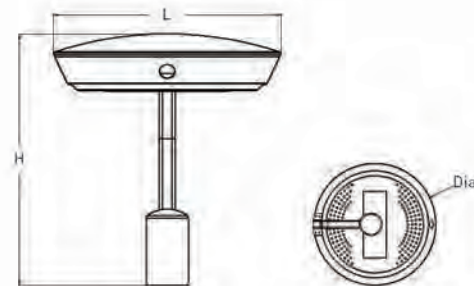

APT010254

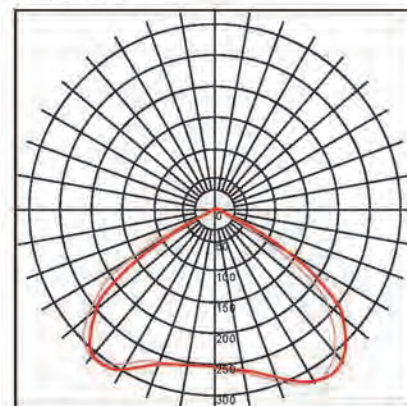

Photometric  
data

\*Condition Apply



## BOLLARD LIGHT

Decorative & cylindrical shape LED Bollard Light with integrated LED Driver offers comfortable softlight, high durability & IP 65 protection



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas


Garden lighting | Path ways | Landscape area

	6W
3000K	ABD010063 200lm
4000K	ABD010064 215lm
6000K	ABD010066 230lm
Weight	1.8kg
Dimension (mm) (L/Dia x W/Dia x H)	90 x 90 x 800
Cut Out Dimension (mm)	N/A

Line  
Diagram

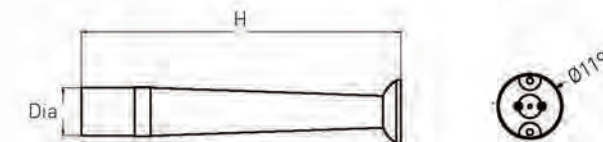

ABD010066

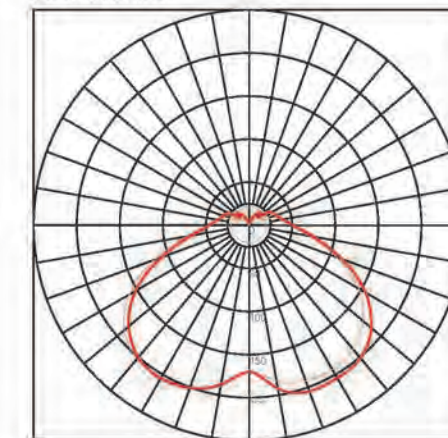

Photometric  
data

\*Condition Apply





## SPIKE LIGHT

Stylish, Robust, reliable spike Light/ Bush Light with aluminum housing offers uniform light distribution with IP65 Protection suitable to provide accent lighting for verity of application.



### Product Specification


- Input voltage: AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas


Garden area | Landscape area

6W	
3000K	ASK010063 310lm
6500K	ASK010066 345lm
RED	ASK01006R 135lm
GREEN	ASK01006G 284lm
AMBER	ASK01006A 280lm
Weight	0.7kg
Dimension (mm) (L/Dia x W/Dia x H)	60 x 113 x 322
Cut Out Dimension (mm)	N/A

Line  
Diagram



ASK010066

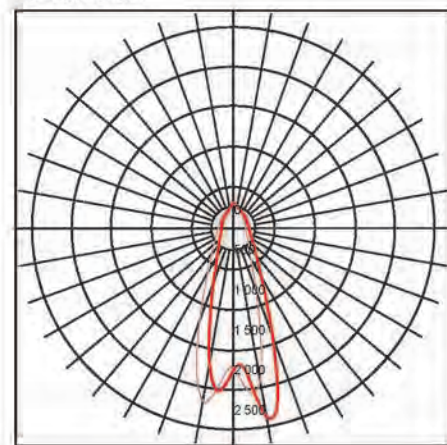


Photometric  
data

\*Condition Apply



## STEP LIGHT

Robust and reliable LED step Light with aluminum housing offers uniform light distribution, high durability and IP65 Protection



### Product Specification


- Input voltage: AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas


Garden area | Landscape area

3W	
4000K	ASE010034 135lm
6000K	ASE010036 144lm
Weight	0.25 kg
Dimension (mm) (L/Dia x W/Dia x H)	127 x 70 x 50.5
Cut Out Dimension (mm)	58 x 114.8

Line  
Diagram



ASE010036

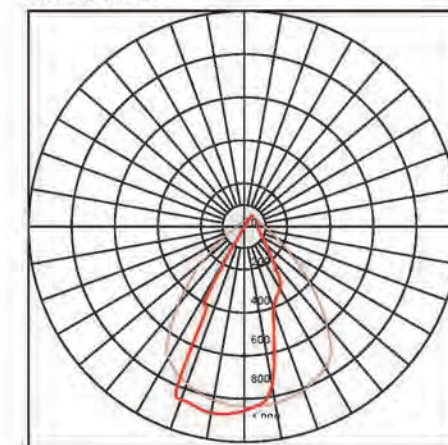

Photometric  
data

\*Condition Apply





## UP DOWN SQUARE

Surface mounted decorative LED Up Down light with aluminum housing offers uniform light distribution with IP65 protection suitable for wall mount application.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas

Garden lighting | Landscape area


4W	
3000K	AUD010043 290lm
4000K	AUD010044 300lm
6000K	AUD010046 320lm
Weight	0.75kg
Dimension (mm) (L/Dia x W/Dia x H)	84 x 70 x 180
Cut Out Dimension (mm)	N/A

Line  
Diagram

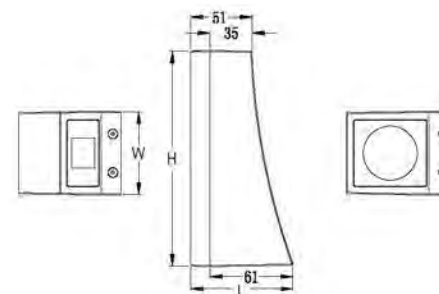

AUD010046

Photometric  
data

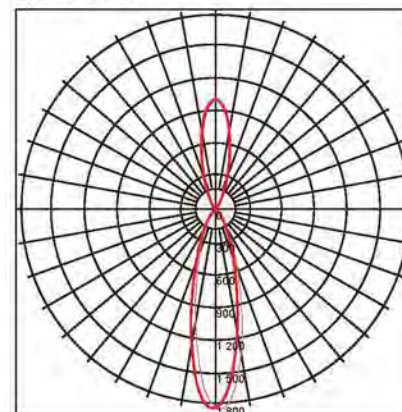

\*Condition Apply



## UP DOWN CIRCULAR

Surface mounted decorative LED Up Down light with aluminum housing offers uniform light distribution with IP65 protection suitable for wall mount application.



### Product Specification


- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 2.5KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

### Application areas

Garden lighting | Landscape area


6W	
3000K	AUD020063 390lm
4000K	AUD020064 405lm
6000K	AUD020066 430lm
Weight	0.45kg
Dimension (mm) (L/Dia x W/Dia x H)	60 x 60 x 110
Cut Out Dimension (mm)	N/A

Line  
Diagram

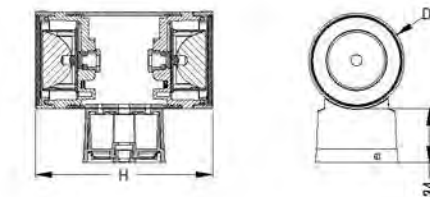

AUD020066

Photometric  
data

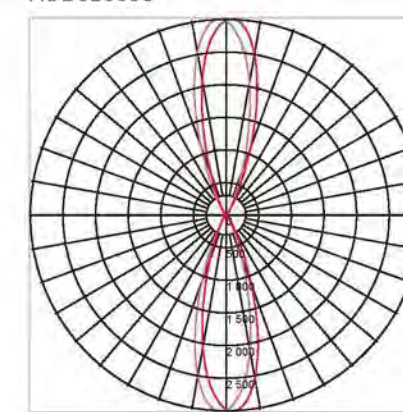

\*Condition Apply





# IN-GROUND LIGHT

Stylish, Robust & reliable in ground light with aluminum housing offers uniform light distribution with IP 67 protection.



## Product Specification



- Input Voltage : AC220-240V, 50/60Hz
- Operating voltage range : 80-330V
- HPF
- High Surge Protection : 4KV
- Average life L70B50: 50,000 hrs
- Confirmed to IEC Safety Standard (IEC60598, IEC61347)
- Optics : PMMA
- With Driver

## Application areas




Garden lighting | Path ways  
Landscape area

	3W	9W	18W
3000K	AGL010033 243lm	AGL010093 730lm	AGL010183 1220lm
6000K	AGL010036 270lm	AGL010096 808lm	AGL010186 1339lm
RED	AGL01003R 79lm	AGL01009R 236lm	AGL01018R 472lm
GREEN	AGL01003G 152lm	AGL01009G 459lm	AGL01018G 919lm
AMBER	AGL01003A 150lm	AGL01009A 450lm	AGL01018A 900lm
Weight	1.4kg	2.4kg	2.4kg
Dimension (mm) (L/Dia x W/Dia x H)	115 x 115 x 175	160 x 160 x 190	160 x 160 x 190
Cut Out Dimension (mm)	Ø90	Ø140	Ø140

Line  
Diagram



Photometric  
data

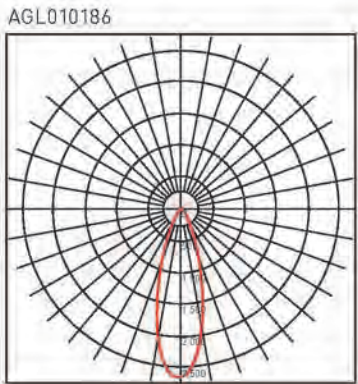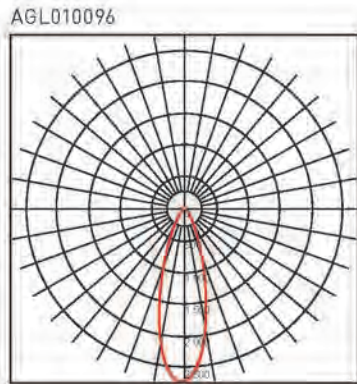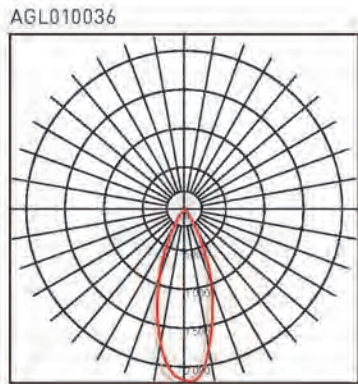



## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.**Terms & Conditions:**

All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence. If any dispute should arise, it will be subject to Mumbai jurisdiction.

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins or other markings on the paper.**Terms & Conditions:**

All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence. If any dispute should arise, it will be subject to Mumbai jurisdiction.



## HEAD / REGIONAL OFFICES

### WEST-1 (H.O.)

Anchor Electricals Pvt. Ltd.  
3rd Floor, B Wing, I-Think  
Techno Campus, Pokhran Road No. 2,  
Thane (W), Thane - 400 607  
Maharashtra Tel: 022 30418888

### EAST

Anchor Electricals Pvt. Ltd.  
4th Floor, Block "C",  
Apeejay House, 15, Park Street,  
Kolkata, West Bengal - 700 016  
Tel: 033 32219196

### SOUTH

Anchor Electricals Pvt. Ltd.  
No. 8-12, 3rd Floor, Prestige Nebula-II,  
Infantry Road, Bengaluru,  
Karnataka - 560 001  
Tel: 080 30284400 - 40

### NORTH-1

Anchor Electricals Pvt. Ltd.  
SCO-40, 1st Floor,  
NAC Manimajra,  
Chandigarh - 160101  
Tel: 0172 3255715

### NORTH-2

Anchor Electricals Pvt. Ltd.  
6th Floor, TDI Centre,  
Jasola District,  
New Delhi - 110 025  
Tel: 011 46006400

## STATE / SALES OFFICES

### NORTH-1

#### JAMMU

Anchor Electricals Pvt. Ltd.  
85/1, 1st Floor, Trikuta Nagar,  
Jammu - 180 012  
Tel: 0191 2470735 / 36

#### PUNJAB

Anchor Electricals Pvt. Ltd.  
B-20/ 2813 / 13-A, 3rd Floor,  
Ranjit Tower, Pakhowal Road,  
Gurdev Nagar, Ludhiana - 141001  
[Punjab]  
Tel: 0161 4630796

#### AMRITSAR

Anchor Electricals Pvt. Ltd.  
45, Deep Complex, Court Road,  
Amritsar, Punjab - 143 001  
Tel: 0183 3292567

#### UTTARAKHAND

Anchor Electricals Pvt. Ltd.  
Khasra No. 332-333-335 & 339,  
1st Floor, Main Saharanpur Road,  
Niranjanpur, Opp. Institute of  
Hotel Management, HCL Compound,  
Dehradun - 248 001  
Tel: 0135 3241686

#### HALDWANI

Anchor Electricals Pvt. Ltd.  
Shop No. U-28, Upper Ground Floor,  
Phase - 1, Durga City Centre,  
Haldwani - 263 141

### NORTH-2

#### JAIPUR

Anchor Electricals Pvt. Ltd.  
224-225, 2nd Floor,  
Ganpati Plaza, M.I. Road,  
Jaipur, Rajasthan - 302 001  
Tel: 0141 3007666 / 2331369

#### UDAIPUR

Anchor Electricals Pvt. Ltd.  
4C/201, Riddhi Siddhi  
Complex, Madhuvan,  
Udaipur, Rajasthan - 313 001  
Tel: 0294 2422412

#### JODHPUR

Anchor Electricals Pvt. Ltd.  
27/20, Light Industrial Area,  
Near ITI Circle, Jodhpur - 342003

#### KOTA

Anchor Electricals Pvt. Ltd.  
Office No. 6, Plot No. 621,  
1st Floor, Mukesh Plaza,  
Dadabari, Kota,  
Rajasthan - 324 009  
Tel: 0744 2500368

#### UTTAR PRADESH

Anchor Electricals Pvt. Ltd.  
201, Govinda Building, 1-A,  
Shahnajaf Road,  
Hazratganj, Lucknow,  
Uttar Pradesh - 226 001  
Tel: 0522 3920999

#### VARANASI

Anchor Electricals Pvt. Ltd.  
P. N. 204, H No. C-27/274 A-3,  
S-1, 2nd Floor, Dr. Jai Singh  
Building, Maldahiya, Varanasi,  
Uttar Pradesh - 221 001

### EAST-1

#### WEST BENGAL

Anchor Electricals Pvt. Ltd.  
1st Floor, Hanshara House,  
Beside City Mall (Bazar Kolkata),  
Sevoke Road, Siliguri - 734 001

#### ASSAM

Anchor Electricals Pvt. Ltd.  
Duhang Arcade 2A, 2nd Floor, G. S Road, Tarun Nagar,  
Opp. Dona Planet, Guwahati, Assam - 781 005  
Tel: 0361 2450577

### EAST-2

#### BIHAR

Anchor Electricals Pvt. Ltd.  
F-1, 1st Floor, Gitanjali Palace,  
Jamal Road, Patna, Bihar - 800 001  
Tel: 0612 3297075

#### ODISHA

Anchor Electricals Pvt. Ltd.  
2nd Floor, Creative Plaza,  
Rasulgarh Square, Mouzabomikhal,  
Bhubaneswar, Odisha - 751 010  
Tel: 0674 3240109

#### SAMBALPUR

Anchor Electricals Pvt. Ltd.  
Quality Mansion, 1st Floor,  
Nayapada, Sambalpur,  
Odisha - 768 001

#### RANCHI

Anchor Electricals Pvt. Ltd.  
509, 5th Floor, R.R. Tower, Opp. Akashwani,  
Ratu Road, Ranchi, Jharkhand - 834 005  
Tel: 0651 3241617

### WEST-1

#### GOA

Anchor Electricals Pvt. Ltd.  
403, Gera Imperium II, 4th Floor,  
Patto Panjim, Goa - 403 001  
Tel: 0832 3294189 / 3193131

#### PUNE

Anchor Electricals Pvt. Ltd.  
Fifth Avenue, Office No. E4-A,  
4th Floor, Dhole Patil Road,  
Pune - 411 001 Tel: 020 66207260

#### NAVI MUMBAI

Anchor Electricals Pvt. Ltd.  
Arenja Corner, 3rd Floor, 301,  
Sector 17, Vashi, Navi Mumbai,  
Maharashtra - 400 703 Tel: 022 65551316

#### NANDED

Anchor Electricals Pvt. Ltd.  
101 Millennium Tower, Bhawsar Chowk,  
Malegaon Road, Taroda Naka, Nanded - 431 605  
Tel: 02462 266855

#### AURANGABAD

Anchor Electricals Pvt. Ltd.  
Plot No. 8, Raj Tower, 2nd Floor,  
Near Angethi Hotel, Jalna Road,  
Aurangabad - 431 001 Tel: 0240 6500200

#### KOLHAPUR

Anchor Electricals Pvt. Ltd.  
1st Floor, Office No. 4, Namdev Nest,  
Above Axis Bank, Opp. Kamla College,  
Rajarampuri, Takala, C.S. No. 1160B  
Kolhapur - 416 001 Tel: 0231 6050945

#### KALBADEVI ROAD

Anchor Electricals Pvt. Ltd.  
C-369/485, Takwadi, Behind  
Bank of India, 485, Kalbadevi Road,  
Mumbai - 400 002  
Tel: 022 39567073

#### NAGPUR

Anchor Electricals Pvt. Ltd.  
Tapashiya, 1st Floor, Near Rahale  
Hospital, Adamsha Chowk,  
Nagpur - 440 008  
Tel: 09370430999

#### NASHIK

Anchor Electricals Pvt. Ltd.  
Archit Icon, 1st Floor,  
Patil Lane Road,  
Nashik - 422 005

### WEST-2

#### CHHATTISGARH

Anchor Electricals Pvt. Ltd.  
316-317 (A to E), Ravi Bhavan,  
3rd Floor, Jaistambh Chowk,  
Raipur - 492 001  
Tel: 0771 3291701

#### GUJARAT

Anchor Electricals Pvt. Ltd.  
405, 3rd Eye One Complex,  
Opp. Havmor Restaurant, Panchvati,  
C.G. Road, Ahmedabad,  
Gujarat - 380 006 Tel: 079 30063870 / 26460172

#### SURAT

Anchor Electricals Pvt. Ltd.  
403, 4th Floor, Union Trade Centre,  
Beside Apple Hospital, Udhana  
Darwaja, Ring Road, Surat,  
Gujarat - 395 002 Tel: 0261 3002008 / 09

#### VADODARA

Anchor Electricals Pvt. Ltd.  
306, Atlantis, Near Croma,  
Genda Circle Road, Vadodara,  
Gujarat - 390 007 Tel: 0265 6541992

#### RAJKOT

Anchor Electricals Pvt. Ltd.  
Office No. 502, 5th Floor, King's Plaza,  
Astrone Chowk, Sardar Nagar, Main Road,  
Rajkot, Gujarat - 360 001  
Tel: 0281 3010400

#### INDORE

Anchor Electricals Pvt. Ltd.  
318, 3rd Floor, D. M. Tower,  
21/1, Race Course Road,  
Indore - 452 003  
Tel: 0731 3952501 / 05

#### BHOPAL

Anchor Electricals Pvt. Ltd.  
Manya Arcade, 201, 2nd Floor,  
Plot No. 30, M P Nagar, Zone - II  
Bhopal - 462 011  
Tel: 0755 3061815 / 16

### SOUTH-1

#### TELANGANA

Anchor Electricals Pvt. Ltd.  
G2 1-8 384/385, Gowra Grand,  
S. P. Road, Begumpet,  
Secunderabad,  
Telangana - 500 003  
Tel: 040 30482989 / 99

#### BENGALURU

Anchor Electricals Pvt. Ltd.  
Prestige Nebula - II, 3rd Floor,  
Block 2nd, Infenrity Road,  
Cubbon Road, Bengaluru - 560 001  
Tel: 080 30284400 / 01

#### MANGALORE

Anchor Electricals Pvt. Ltd.  
225, 1st Floor, Ideal Tower,  
Opp Saravu Ganpathi Temple,  
Hampanakatta,  
Mangalore - 575 001

#### MYSORE

Anchor Electricals Pvt. Ltd.  
Nakshatra, No. 858/859,  
CS 20 K. R. Mohalla, Narayana  
Shastry Road, Mysore,  
Karnataka - 570 024

#### HUBLI

Anchor Electricals Pvt. Ltd.  
A/122-146, 2nd Floor, Mahalaxmi  
Mansion, Above Axis Bank,  
New Cotton Market,  
Deshpande Nagar, Hubli - 580 029  
Tel: 0836 3296694

#### ANDHRA PRADESH

Anchor Electricals Pvt. Ltd.  
Door No. 49/1015, V.N.R.  
Tower, 2nd Floor, Labbipet  
Krishna, Vijayawada - 520 010  
Tel: 0866 3056789

### SOUTH-2

#### KERALA

Anchor Electricals Pvt. Ltd.  
K. P. Varkey & Madathiparambi  
Complex, 1st Floor, 351/1085 D,  
Palarivattom, Cochin - 683 525  
Tel: 0484 3951000 / 01

#### TAMILNADU

Anchor Electricals Pvt. Ltd.  
Level 3, Ispahani Centre, 123-124,  
Nungambakkam High Road,  
Chennai, Tamilnadu - 600 034  
Tel: 044 30261700 / 01

#### COIMBATORE

Anchor Electricals Pvt. Ltd.  
Balavasantha Complex,  
No.1 Bharthi Park, Cross Road 2,  
NSR Road, Saibaba Colony,  
Coimbatore - 641 011  
Tel: 0422 3226214 / 17

#### MADURAI

Anchor Electricals Pvt. Ltd.  
Wise House, Door No. 109,  
Vakil New Street, Madurai,  
Tamilnadu - 625 001  
Tel: 0452 3720898 / 99

#### PONDICHERRY

Anchor Electricals Pvt. Ltd.  
201, 1st Floor, Mission Street,  
Pondicherry - 605 001  
Tel: 0413 3190071 / 3190081

### SHOWROOM ADDRESS

#### BENGALURU

#40/1, Ground Floor,  
Vittal Mallya Road,  
Bengaluru - 560 001